

AL500-SB-N-NT-AWS SPEC





SHORT BARREL COMPRESSION LUG

CONNECTOR BORES ARE COATED WITH OXIDE INHIBITOR AND CAPPED
HIGH CONDUCTIVITY WROUGHT ALUMINUM
TIN-PLATED FOR CORROSION RESISTANCE


CABLE SPECIFICATIONS
CLASS B – 500 MCM
DUAL RATED – AL9CU
VOLTAGE – 35KV MAX
TEMPERATURE – 90°C

INSTALLATION
U-TYPE DIE INDEX – 300 PINK
STRIP LENGTH – 2.00”
OF CRIMPS – 2

MOUNTING
2 HOLE NEMA – 1/2” BOLT HOLES
AT 1-3/4” SPACING

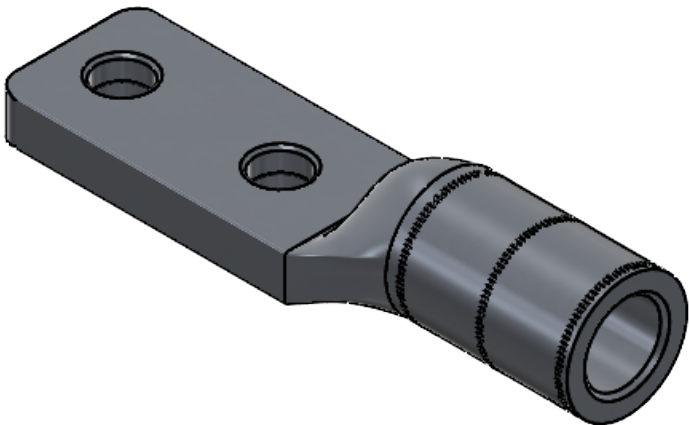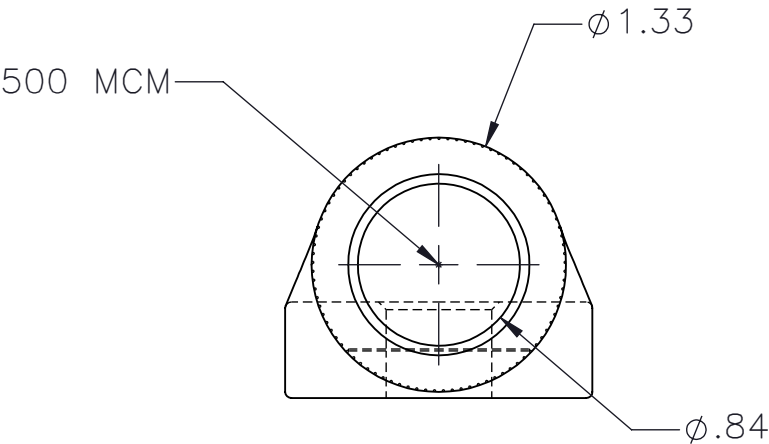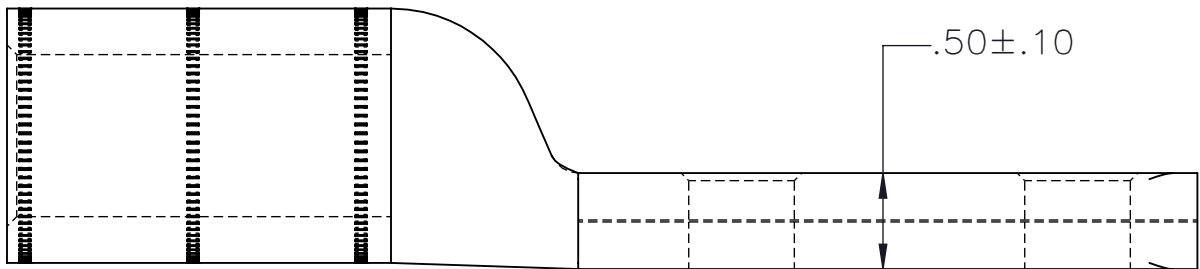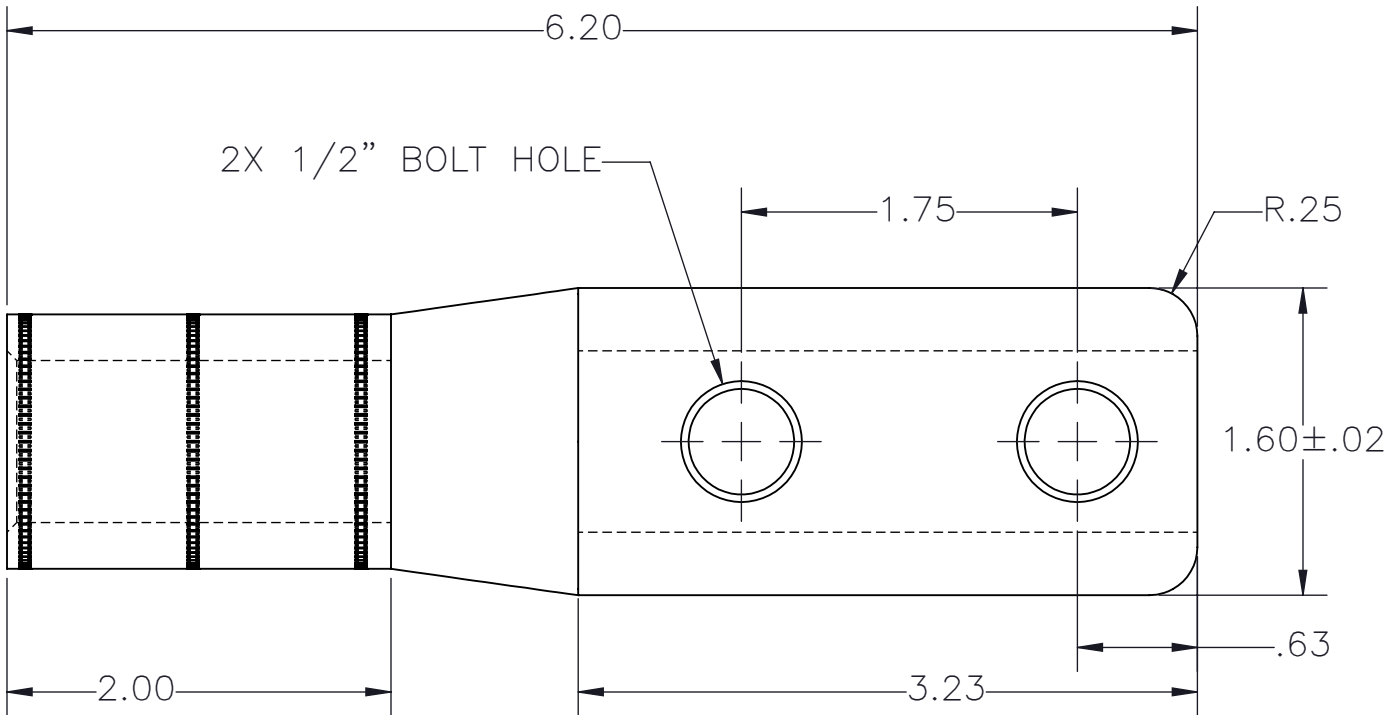


ZMVV.E28698

DIMENSIONS ARE USED FOR REFERENCE ONLY	APPROVALS		DATE		 GREAVES CORPORATION 30 INDUSTRIAL PARK ROAD CENTERBROOK, CT 06409		
	DRAFTER	RDH	2/27/2026				
	CHECKER	PTO	2/27/2026				
THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING				TITLE AL500-SB-N-NT		
	MATERIAL						
	ALUMINUM						
	FINISH						
	TIN-PLATED				SIZE B	DWG NO SD-10-94844	REV -
SCALE 1:1		WEIGHT 0.49708 LBS.		SHEET 1 OF 1			