



COMPRESSION

PEEP HOLE STANDARD BARREL COPPER LUGS

Produced from high conductivity seamless copper tubing

Allows inspection of the termination to assure complete cable insertion

Marked with die index and color coded

Tin plated to provide corrosion resistance



GL SERIES

One-Hole

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT SIZE	U-TYPE DIE		CTN QTY	EST. SHIPPING	
				COLOR	INDEX		WEIGHT (lbs)	UNIT
32000	† GL 810		10				1.44	CTN
32002	GL 814	#8	1/4	RED	6	100	1.38	CTN
31999	GL 610		10				1.85	CTN
32004	† GL 614	#6	1/4	BLUE	7/374	100	1.81	CTN
32001	GL 656		5/16				1.86	CTN
32003	GL 638		3/8				1.84	CTN
32005	GL 414		1/4				2.30	CTN
32006	GL 456	#4	5/16	GRAY	8/346	100	2.32	CTN
32008	GL 438		3/8				2.45	CTN
32017	GL 338	#3	3/8	WHITE	9	50	1.29	CTN
32007	GL 214		1/4				1.96	CTN
32009	GL 256	#2	5/16	BROWN	10	50	1.92	CTN
32010	GL 238		3/8				1.81	CTN
32011	GL 114		1/4				2.03	CTN
32013	GL 156	#1	5/16	GREEN	11/375	50	2.13	CTN
32012	GL 138		3/8				2.05	CTN
32015	GL 1056		5/16				2.58	CTN
32014	† GL 1038	1/0	3/8	PINK	12/348	50	2.51	CTN
32016	GL 1048		1/2				2.54	CTN
32019	GL 2056		5/16				1.60	CTN
32018	† GL 2038	2/0	3/8	BLACK	13	25	1.60	CTN
32020	GL 2048		1/2				1.66	CTN
32022	† GL 3038	3/0	3/8	ORANGE	14	25	2.11	CTN
32024	GL 3048		1/2				2.00	CTN
32027	† GL 4038	4/0	3/8	PURPLE	15	25	2.58	CTN
32026	GL 4048		1/2				2.60	CTN
32028	† GL 25048	250	1/2	YELLOW	16	25	3.70	CTN
32030	† GL 30048	300	1/2	WHITE	17/298	12	1.79	CTN
32032	† GL 35048	350	1/2	RED	18/324	12	2.30	CTN
32034	† GL 40048	400	1/2	BLUE	19/470	6	1.40	CTN
32036	† GL 50048	500	1/2	BROWN	20/299	6	2.20	CTN
32038	* GL 60048	600	1/2	GREEN	22/472	6	3.30	CTN
32040	†* GL 75048	750	1/2	BLACK	24/473	3	1.93	CTN
32041	†* GL 75058		5/8				1.90	CTN
32042	†* GL 100058	1000	5/8	WHITE	27	3	2.64	CTN

*Size not UL listed.

For copper cable



600 V**

† NEMA stud drilling



- For angle lugs consult factory for availability.
- For 90° angle lugs use L Series
- For blank tangs consult factory for availability.

GL-N SERIES

Two-Hole NEMA

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT SIZE	U-TYPE DIE		CTN QTY	EST. SHIPPING	
				COLOR	INDEX		WEIGHT (lbs)	UNIT
32044	GL 20N	2/0	1/2	BLACK	13		2.82	CTN
32046	GL 30N	3/0	1/2	ORANGE	14	25	3.44	CTN
32048	GL 40N	4/0	1/2	PURPLE	15		4.31	CTN
32050	GL 250N	250	1/2	YELLOW	16		5.53	CTN
32052	GL 300N	300	1/2	WHITE	17/298	12	2.82	CTN
32054	GL 350N	350	1/2	RED	18/324	12	3.06	CTN
32056	GL 400N	400	1/2	BLUE	19/470	6	2.11	CTN
32058	GL 500N	500	1/2	BROWN	20/299	6	3.18	CTN
32060	* GL 600N	600	1/2	GREEN	22/472	6	4.51	CTN
32062	†† GL 750N	750	1/2	BLACK	24/473	3	2.51	CTN
32064	* GL 1000N	1000	1/2	WHITE	27	1	1.34	CTN



600 V**

Suffix "N" indicates NEMA tang drilling, 1 3/4" on centers for 1/2" bolts.

†† GL750N lugs have a 1 3/4" tang width, to accommodate side by side NEMA stud spacing.

**May be used for up to 35KV applications when proper installation and insulation procedures are employed.

*Size not UL listed.

www.greaves-usa.com

Phone 860-664-4505 • Fax 860-664-4546

TOLL FREE 1-800-243-1130 (Outside CT)



GREAVES

COMPRESSION

LONG BARREL COPPER LUGS

Long barrel for heavy duty applications
Produced from high conductivity seamless copper tubing
Tin plated to provide corrosion resistance
Marked with die index and color coded



L SERIES


One-Hole

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT SIZE	U-TYPE DIE		CTN QTY	EST. SHIPPING	
				COLOR	INDEX		WEIGHT (lbs)	UNIT
41105	† L 614		1/4				2.31	CTN
41106	L 656	#6	5/16	BLUE	7/374	100	2.25	CTN
41108	L 638		3/8				2.17	CTN
41109	L 414		1/4				2.92	CTN
41110	L 456	#4	5/16	GRAY	8/346	100	3.02	CTN
41115	L 438		3/8				2.98	CTN
41117	L 338	#3	3/8	WHITE	9	50	1.58	CTN
41118	L 214		1/4				2.21	CTN
41119	L 256	#2	5/16	BROWN	10	50	2.16	CTN
41120	L 238		3/8				2.22	CTN
41123	L 114		1/4				2.77	CTN
41124	L 156	#1	5/16	GREEN	11/375	50	2.87	CTN
41125	L 138		3/8				2.65	CTN
41129	L 1014		1/4				3.43	CTN
41130	† L 1038	1/0	3/8	PINK	12/348	50	3.44	CTN
41135	L 1048		1/2				3.58	CTN
41140	† L 2038		3/8				2.17	CTN
41145	L 2048	2/0	1/2	BLACK	13	25	2.22	CTN
41150	† L 3038		3/8				2.15	CTN
41155	L 3048	3/0	1/2	ORANGE	14	25	2.62	CTN
41156	† L 4038		3/8				3.51	CTN
41160	L 4048	4/0	1/2	PURPLE	15	25	3.39	CTN
41164	L 25038		3/8				4.40	CTN
41165	† L 25048	250	1/2	YELLOW	16	25	4.36	CTN
41170	† L 30048	300	1/2	WHITE	17/298	12	2.33	CTN
41175	† L 35048	350	1/2	RED	18/324	12	3.12	CTN
41180	L 40048	400	1/2	BLUE	19/470	6	1.69	CTN
41185	† L 50048	500	1/2	BROWN	20/299	6	2.91	CTN
41190	* L 60048	600	1/2	GREEN	22/472	6	4.37	CTN
41192	* L 75048		1/2				2.44	CTN
41195	†* L 75058	750	5/8	BLACK	24/473	3	2.40	CTN
41200	†* L 100058	1000	5/8	WHITE	27		1.30	EA
41202	††* L 125058	1250	5/8	YELLOW	29	1	1.45	EA
41204	††* L 150058	1500	5/8	GREEN	31		1.83	EA
41206	††* L 200058	2000	5/8	BROWN	34		2.57	EA

For copper cable



600 V**
† NEMA stud drilling

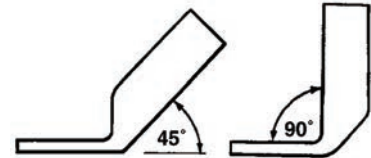

- For angle lugs consult factory for availability.
- For blank tangs consult factory for availability.

** May be used for applications up to 35 KV when proper installation and insulation procedures are employed.

* Size not UL.

†† Size not CSA.



COMPRESSION



LONG BARREL COPPER LUGS

Long barrel for heavy duty applications
Produced from high conductivity seamless copper tubing
Tin plated to provide corrosion resistance
Marked with die index and color coded

For copper cable

600 V**

L-N SERIES

Two-Hole NEMA


NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT		U-TYPE DIE		CTN QTY	EST. SHIPPING	
			SIZE	SPACING	COLOR	INDEX		WEIGHT (lbs)	UNIT
33069	L 6N	#6			BLUE	7/347		1.34	CTN
33049	L 4N	#4			GRAY	8/346	20	1.10	CTN
33029	L 2N	#2	1/2	1 3/4	BROWN	10		1.60	CTN
33019	L 1N	#1			GREEN	11/375		1.90	CTN
40000	L 10N	1/0			PINK	12/348		2.91	CTN
40005	L 20N	2/0			BLACK	13		3.50	CTN
40010	L 30N	3/0	1/2	1 3/4	ORANGE	14	25	4.01	CTN
40015	L 40N	4/0			PURPLE	15		5.24	CTN
40020	L 250N	250			YELLOW	16		6.12	CTN
40025	L 300N	300			WHITE	17/298	12	3.41	CTN
40030	L 350N	350			RED	18/324	12	4.61	CTN
40035	L 400N	400	1/2	1 3/4	BLUE	19/470	6	2.36	CTN
40040	L 500N	500			BROWN	20/299	6	3.89	CTN
40045	*L 600N	600			GREEN	22/472	6	5.52	CTN
40050	*L 750N††	750			BLACK	24/473	3	3.30	CTN
40055	*L 1000N††	1000			WHITE	27	1	1.78	EA
40056	*L 1250N††	1250	1/2	1 3/4	YELLOW	29	1	2.05	EA
40057	*L 1500N††	1500			GREEN	31	1	2.51	EA
40059	*L 2000N††	2000			BROWN	34	1	3.53	EA

†† All Lugs through 750 MCM have a 1 3/4" or less tang width to accommodate side by side NEMA stud spacing.

** May be used for applications up to 35 KV when proper installation and insulation procedures are employed.

* Size not UL.

†† Size not CSA.

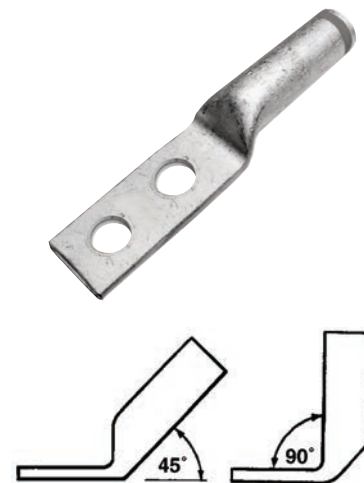

- For angle lugs consult factory for availability.
- For blank tangs consult factory for availability.

LONG BARREL STACKING COPPER LUGS

Long barrel for heavy duty applications
Produced from high conductivity seamless copper tubing
Tin plated to provide corrosion resistance
Marked with die index and color coded
Designed specifically to fit with Greaves LN Series lugs

For copper cable
600 V**

SL-N SERIES

Two-Hole NEMA

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT		U-TYPE DIE		EST. SHIPPING	
			SIZE	SPACING	COLOR	INDEX	WEIGHT (lbs)	UNIT
71801	SL 20N	2/0			BLACK	13	0.18	EA
71802	SL 30N	3/0			ORANGE	14	0.20	EA
71803	SL 40N	4/0	1/2	1 3/4	PURPLE	15	0.24	EA
71804	SL 250N	250			YELLOW	16	0.30	EA
71805	SL 300N	300			WHITE	17/298	0.33	EA
71806	SL 350N	350			RED	18/324	0.43	EA
71807	SL 400N	400	1/2	1 3/4	BLUE	19/470	0.44	EA
71808	SL 500N	500			BROWN	20/299	0.64	EA
71809	*SL 600N	600			GREEN	22/472	0.96	EA
71811	††*SL 750N	750	1/2	1 3/4	BLACK	24/473	1.15	EA
71812	*SL 1000N	1000			WHITE	27	1.20	EA


** May be used for applications up to 35 KV when proper installation and insulation procedures are employed.

†† All lugs through 750 MCM have a 1 3/4" or less tang width to accommodate side by side NEMA stud spacing.

* Size not UL.



SL-N fits on
L-N straight lugs

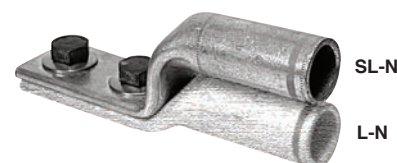

CAUTION

May not fit competitor lugs.
Greaves L-N Series lugs are recommended to make a stacking set.



COMPRESSION

LONG BARREL FOUR-HOLE COPPER LUGS

Long barrel for heavy duty applications
 Produced of high conductivity wrought copper
 Tin-plated for corrosion protection
 Marked with die index number

For copper cable
 600 V**

L-4N SERIES

Four-Hole NEMA

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT		PAD THICKNESS	U-TYPE DIE		CTN QTY	EST. SHIPPING	
			SIZE	SPACING		COLOR	INDEX		WEIGHT (lbs)	UNIT
40080	L 40-4N	4/0 AWG			3/16	PURPLE	15	1	.88	EA
40081	L 250-4N	250 MCM			3/16	YELLOW	16		.98	EA
40082	L 350-4N	350 MCM			3/16	RED	18/324		1.06	EA
40083	L 500-4N	500 MCM			1/8	BROWN	20/299		1.22	EA
40084	L 750-4N	750 MCM	1/2	1 3/4	1/4	BLACK	24/473		1.41	EA
40085	L 1000-4N	1000 MCM			3/8	WHITE	27		2.27	EA
40086	L 1250-4N	1250 MCM			3/8	YELLOW	29		2.50	EA
40087	L 1500-4N	1500 MCM			11/32	GREEN	31		2.77	EA
40089	L 2000-4N	2000 MCM			15/32	BROWN	34		3.50	EA




Pad width 3 inches. Other sizes available. Consult factory.

COPPER TEE

High conductivity seamless copper tubing
 Use CRA adapter to accommodate smaller wire size
 Tin plated for corrosion resistance
 Long barrel for two die impressions per wire
 Marked with die index number

For copper cable
 600V**



CCT SERIES

NAED NUMBER	CATALOG NUMBER	WIRE SIZE		DIMENSIONS (NOM)		DIE-MAIN		DIE-TAP		EST. SHIPPING	
		MAIN	TAP	L	T	COLOR	INDEX	COLOR	INDEX	WEIGHT (lbs)	UNIT
40206	CCT6	#6	#6	3.75	1.50	BLUE	7/347	BLUE	7/347	0.03	EA
40204	CCT4	#4	#4	3.81	1.50	GRAY	8/346	GRAY	8/346	0.04	EA
40202	CCT2	#2	#2	3.87	1.50	BROWN	10	BROWN	10	0.11	EA
40201	CCT1	#1	#1	3.94	1.50	GREEN	11/375	GREEN	11/375	0.11	EA
40210	CCT10	1/0	1/0	4.00	1.50	PINK	12/348	PINK	12/348	0.15	EA
40220	CCT20	2/0	2/0	4.16	1.62	BLACK	13	BLACK	13	0.18	EA
40230	CCT30	3/0	3/0	4.31	1.68	ORANGE	14	ORANGE	14	0.20	EA
40240	CCT40	4/0	4/0	4.44	1.75			PURPLE	15	0.25	EA
40241	CCT40-10	4/0	1/0	4.25	1.75	PURPLE	15	PINK	12/348	0.20	EA
40242	CCT40-2	4/0	#2	4.18	1.75			BROWN	10	0.18	EA
40225	CCT250	250	250	4.56	1.75	YELLOW	16	YELLOW	16	0.32	EA
40235	CCT350	350	350	5.91	2.19	RED	18/324	RED	18/324	0.55	EA
40250	CCT500	500	500	6.72	2.60			BROWN	20/299	0.94	EA
40254	CCT500-40	500	4/0	6.47	2.60			PURPLE	15	0.68	EA
40252	CCT500-20	500	2/0	6.36	2.60	BROWN	20/299	BLACK	13	0.60	EA
40259	CCT500-2	500	#2	6.24	2.60			BROWN	10	0.55	EA
40260	CCT600	600	600	7.87	3.09	GREEN	22/472	GREEN	22/472	1.21	EA
40275	CCT750	750	750	7.87	3.39	BLACK	24/473	BLACK	24/473	1.50	EA

Other sizes also available, consult factory.

**May be used for up to 35KV applications when proper installation and insulation procedures are employed.



COMPRESSION

TELECOMMUNICATIONS LUGS


Long barrel copper compression terminals for telecommunications applications
 Produced from high conductivity seamless copper tubing
 Tin plated to provide corrosion resistance
 Marked with die index and color coded
 Sight-hole for inspection on sizes #8 - 4/0 AWG

For copper cable
600V

L-TC SERIES

Two-Hole

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT HOLES		U-TYPE DIE		CTN QTY	EST. SHIPPING			
			SIZE	SPACING	COLOR	INDEX		WEIGHT (lbs)	UNIT		
33080	L8-TC10-1	#8	#10	5/8	RED	6	50	1.00	CTN		
33081	L8-TC14-1		1/4	5/8			1.17	CTN			
33061	L6-TC14-1	#6	1/4	5/8	BLUE	7/374	50	1.39	CTN		
33062	L6-TC14-2		1/4	3/4			50	1.45	CTN		
33064	L6-TC14-5		1/4	1			50	1.50	CTN		
33066	L6-TC38-2		3/8	3/4			25	0.76	CTN		
33067	L6-TC38-5		3/8	1			25	0.90	CTN		
33068	*L6-TC38-25		3/8	3/4-1			25	1.00	CTN		
33041	L4-TC14-1	#4	1/4	5/8	GRAY	8/346	25	0.94	CTN		
33042	L4-TC14-2		1/4	3/4			25	1.01	CTN		
33046	L4-TC38-2		3/8	3/4			25	1.00	CTN		
33047	L4-TC38-5		3/8	1			25	0.94	CTN		
33031	L3-TC14-1	3 & 2 SOL	1/4	5/8	WHITE	9	25	0.94	CTN		
33037	L3-TC38-5		3/8	1			25	1.28	CTN		
33021	L2-TC14-1	#2	1/4	5/8	BROWN	10	25	1.35	CTN		
33022	L2-TC14-2		1/4	3/4			25	1.48	CTN		
33025	L2-TC56-2		5/16	3/4			25	1.43	CTN		
33026	L2-TC38-2		3/8	3/4			25	1.46	CTN		
33027	L2-TC38-5		3/8	1			25	1.58	CTN		
33028	L2-TC38-8		3/8	1 1/4			25	1.56	CTN		
33011	L1-TC14-1		1/4	5/8			GREEN	11/375	25	1.55	CTN
33012	L1-TC14-2		1/4	3/4					25	1.56	CTN
33015	L1-TC56-4	5/16	7/8	25	1.58	CTN					
33016	L1-TC38-2	3/8	3/4	25	1.60	CTN					
33017	L1-TC38-5	3/8	1	25	1.65	CTN					
33101	L10-TC14-1	1/0	1/4	5/8	PINK	12/348	25	2.12	CTN		
33102	L10-TC14-2		1/4	3/4			25	2.16	CTN		
33105	L10-TC56-4		5/16	7/8			25	2.26	CTN		
33107	L10-TC38-5		3/8	1			25	2.34	CTN		
33201	L20-TC14-1	2/0	1/4	5/8	BLACK	13	25	2.45	CTN		
33202	L20-TC14-2		1/4	3/4			25	2.58	CTN		
33207	L20-TC38-5		3/8	1			25	2.77	CTN		
33301	L30-TC14-1	3/0	1/4	5/8	ORANGE	14	25	3.22	CTN		
33302	L30-TC14-2		1/4	3/4			25	3.24	CTN		
33307	L30-TC38-5		3/8	1			25	3.26	CTN		
33402	L40-TC14-2	4/0	1/4	3/4	PURPLE	15	25	4.30	CTN		
33407	L40-TC38-5		3/8	1			25	4.30	CTN		
33257	L250-TC38-5	250	3/8	1	YELLOW	16	12	2.50	CTN		
33337	L300-TC38-5	300	3/8	1	WHITE	17/298		2.66	CTN		
33352	L350-TC14-2	350	1/4	3/4	RED	18/324		2.70	CTN		
33357	L350-TC38-5	350	3/8	1	RED	18/324		2.72	CTN		
33502	L500-TC14-2	500	1/4	3/4	BROWN	20/299	6	2.72	CTN		
33507	L500-TC38-5	500	3/8	1	BROWN	20/299		3.33	CTN		
33607	L600-TC38-5	600	3/8	1	GREEN	22/472	3.35	CTN			
33757	L750-TC38-5	750	3/8	1	BLACK	24/473	3.37	CTN			
33917	L1000-TC38-5	1000	3/8	1	WHITE	27	3.40	CTN			

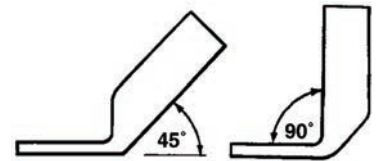

For angle lugs consult factory for availability.

Catalog Number Keys

Key	Bolt Size
TC14	1/4
TC56	5/16
TC38	3/8
TC48	1/2

Key	Hole Spacing
-0	1/2
-1	5/8
-2	3/4
-3	13/16
-4	7/8
-5	1
-6	1 1/4
-7	1 1/2
-8	1 3/4
-25*	3/4-1 Slotted
-S	Special

"TC" indicates telecommunications spacing for tang mounting holes.
 Other sizes and types available; consult factory.
 For blank tangs consult factory for availability.



COMPRESSION

HIGH VOLTAGE COPPER LUGS AND SPLICES

Tapered for corona relief and ease of insulation

For use on copper conductors up to 69KV

Tinned high conductivity seamless copper tubing

C-V SERIES

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	U-TYPE DIE		CTN QTY	EST. SHIPPING	
			COLOR	INDEX		WEIGHT (lbs)	UNIT
70480	C 4 V	#4	GRAY	8/346	50	1.60	CTN
70485	C 2 V	#2	BROWN	10	25	0.98	CTN
70490	C 1 V	#1	GREEN	11/375	25	1.15	CTN
70495	C 10 V	1/0	PINK	12/348	12	0.88	CTN
70500	C 20 V	2/0	BLACK	13	12	0.94	CTN
70505	C 30 V	3/0	ORANGE	14	12	1.06	CTN
70510	C 40 V	4/0	PURPLE	15	12	1.35	CTN
70515	C 250 V	250	YELLOW	16	12	1.71	CTN
70520	C 350 V	350	RED	18/324	12	2.31	CTN
70525	C 500 V	500	BROWN	20/299	6	2.31	CTN
70530	C 750 V	750	BLACK	24/473	6	4.02	CTN

Dimpled center-stop to equalize cable insertions

L-V SERIES

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT SIZE	U-TYPE DIE		CTN QTY	EST. SHIPPING	
				COLOR	INDEX		WEIGHT (lbs)	UNIT
70360	L 4 V	#4	3/8	GRAY	8/346	50	2.15	CTN
70365	L 2 V	#2	3/8	BROWN	10	25	1.40	CTN
70370	L 1 V	#1	3/8	GREEN	11/375	25	1.65	CTN
70375	L 10 V	1/0	3/8	PINK	12/348	12	0.99	CTN
70380	L 20 V	2/0	1/2	BLACK	13	12	1.23	CTN
70385	L 30 V	3/0	1/2	ORANGE	14	12	1.59	CTN
70390	L 40 V	4/0	1/2	PURPLE	15	12	1.83	CTN
70395	L 250 V	250	1/2	YELLOW	16	12	2.31	CTN
70400	L 350 V	350	1/2	RED	18/324	12	2.79	CTN

L-NV SERIES

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	BOLT SIZE	U-TYPE DIE		CTN QTY	EST. SHIPPING	
				COLOR	INDEX		WEIGHT (lbs)	UNIT
70420	L 20 NV	2/0	1/2	BLACK	13	12	1.11	CTN
70425	L 30 NV	3/0	1/2	ORANGE	14	12	1.47	CTN
70430	L 40 NV	4/0	1/2	PURPLE	15	12	1.95	CTN
70435	L 250 NV	250	1/2	YELLOW	16	12	3.27	CTN
70440	L 350 NV	350	1/2	RED	18/324	12	4.47	CTN
70445	L 500 NV	500	1/2	BROWN	20/299	6	4.35	CTN
70450	L 750 NV	750	1/2	BLACK	24/473	6	6.45	CTN

Suffix "N" indicates NEMA tang drilling, 1³/₄" on center for 1/2" bolts.
Consult factory for sizes not listed.

Splice

High Voltage
69 KV



High Voltage
Copper Butt Splices

One-Hole



High Voltage
Copper Lugs

Two-Hole NEMA



High Voltage
2 Hole NEMA
Copper Lugs