




MECHANICAL LUGS – ALUMINUM

Range-taking mechanical set-screw lugs
High strength extruded aluminum alloy
Electro tin plated

SAL SERIES



Dual-Rated
CU9AL
600 V



NAED NUMBER	CATALOG NUMBER	WIRE RANGE AL OR CU		DIMENSIONS (IN)			BOLT SIZE B	FIG.	CTN QTY	EST. SHIPPING WEIGHT (lbs) UNIT		
		MAX.	MIN.	L	W	H				WEIGHT (lbs)	UNIT	
SINGLE BARREL												
50130	*A-614	#4 STR	#14 STR	1 ¹ / ₁₆	1/2	1/2	1/4	1	250	3.31	CTN	
50120	*A-212	#2 STR	#14 STR	1 ¹ / ₁₆	1/2	9/16	1/4	1	200	3.58	CTN	
50110	*A-2/0	2/0 STR	#14 STR	1 ¹ / ₂	5/8	3/4	1/4	1	50	1.78	CTN	
50115	A-3/0	3/0 STR	#6 STR	1 ⁷ / ₈	11/16	7/8	1/4	1	50	3.14	CTN	
50140	A-250	250 MCM	#6 STR	2	1	1	5/16	1	25	2.37	CTN	
50150	A-300	300 MCM	#6 STR	2	1	1	1/4	1	20	1.82	CTN	
50160	A-350	350 MCM	#6 STR	2 ¹ / ₄	1 ¹ / ₈	1 ¹ / ₄	3/8	1	20	2.80	CTN	
50170	A-500	500 MCM	#6 STR	2 ³ / ₄	1 ¹ / ₄	1 ¹ / ₂	3/8	1	10	2.48	CTN	
50180	A-600	600 MCM	#2 STR	3 ¹ / ₈	1 ¹ / ₂	1 ⁹ / ₁₆	1/2	1	5	1.14	CTN	
50190	A-800	800 MCM	300 MCM	3 ³ / ₈	1 ⁹ / ₁₆	1 ⁷ / ₈	5/8	1	5	2.25	CTN	
50200	A-1000	1000 MCM	500 MCM	3 ⁷ / ₈	1 ³ / ₄	1 ⁷ / ₈	5/8	1	5	2.65	CTN	
SINGLE BARREL NEMA TANG DRILLING												
71049	A-250N	250 MCM	#6 STR	4	7/8	1 ³ / ₁₆	1/2	2	3	0.44	CTN	
71050	A-350N	350 MCM	#6 STR	4 ⁵ / ₁₆	1 ¹ / ₈	1 ³ / ₈	1/2	2	3	0.71	CTN	
71055	A-600N	600 MCM	#2 STR	4 ¹ / ₂	1 ³ / ₈	1 ⁵ / ₈	1/2	2	3	1.27	CTN	
71060	A-800N	800 MCM	300 MCM	4 ³ / ₄	1 ³ / ₄	1 ³ / ₄	1/2	2	1	0.59	EA	
71061	A-1000N	1000 MCM	500 MCM	4 ³ / ₄	1 ³ / ₄	1 ³ / ₄	1/2	2	1	0.55	EA	
71056	A-600N-2	600 MCM	2 STR	6 ¹ / ₈	1 ¹ / ₂	1 ⁷ / ₈	1/2	3	1	0.77	EA	
71062	A-800N-2	800 MCM	300 MCM	6 ¹ / ₈	1 ¹ / ₂	1 ⁷ / ₈	1/2	3	1	0.93	EA	
71063	A-1000N-2	1000 MCM	500 MCM	6 ¹ / ₈	1 ¹¹ / ₁₆	1 ⁷ / ₈	1/2	3	1	0.94	EA	
TWO BARREL												
50215	*AA-2/0	2/0 STR	#14 STR	1 ¹ / ₂	1 ¹ / ₈	3/4	1/4	4	25	2.05	CTN	
50220	AA-250	250 MCM	#6 STR	2 ¹ / ₂	1 ⁵ / ₈	1 ³ / ₁₆	3/8	4	10	2.00	CTN	
50230	AA-350	350 MCM	#6 STR	2 ⁷ / ₈	1 ¹⁵ / ₁₆	1 ¹ / ₄	1/2	4	5	0.95	CTN	
50240	AA-600	600 MCM	#2 STR	3 ¹ / ₈	2 ⁷ / ₁₆	1 ⁹ / ₁₆	1/2	4	4	2.18	CTN	
50250	AA-800	800 MCM	300 MCM	3 ³ / ₈	2 ¹⁵ / ₁₆	1 ⁷ / ₈	5/8	4	3	2.65	CTN	
50260	AA-1000	1000 MCM	500 MCM	3 ⁷ / ₈	3 ¹ / ₄	1 ¹⁵ / ₁₆	5/8	4	3	2.83	CTN	

Suffix "N" indicates NEMA tang drilling, 1³/₄" on centers for 1/2" bolts.

* Supplied with slotted screws for screwdriver use.



Figure 1



Figure 2



Figure 3



Figure 4




Figure 4A




Dual-Rated
CU9AL
600 V



MECHANICAL LUGS – ALUMINUM

Range-taking mechanical set-screw lugs
High strength extruded aluminum alloy
Electro tin plated

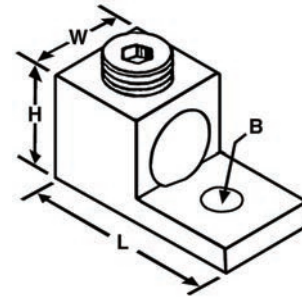

SAL SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE AL OR CU		DIMENSIONS (IN)			BOLT SIZE B	FIG.	CTN QTY	EST. SHIPPING	
		MAX.	MIN.	L	W	H				WEIGHT (lbs)	UNIT
TWO BARREL NEMA TANG DRILLING											
71064	AA-250N	250 MCM	#6 STR	4	1 ¹³ / ₁₆	1 ¹³ / ₁₆	1/2	5	3	1.03	CTN
71065	AA-350N	350 MCM	#6 STR	4 ⁵ / ₁₆	2	1 ³ / ₈	1/2	5	3	1.42	CTN
71070	AA-600N	600 MCM	#2 STR	4 ⁵ / ₈	2 ⁷ / ₁₆	1 ¹ / ₂	1/2	5	3	2.17	CTN
71075	AA-800N	800 MCM	300 MCM	4 ³ / ₄	3 ³ / ₁₆	1 ³ / ₄	1/2	5	1	1.34	EA
12361	AA-1000N	1000 MCM	500 MCM	4 ³ / ₄	3 ³ / ₁₆	1 ³ / ₄	1/2	5	1	1.30	EA
12371	AA-600N-2	600 MCM	#2 STR	5 ⁷ / ₈	2 ⁹ / ₁₆	1 ⁵ / ₈	1/2	5A	3	3.42	CTN
12376	AA-800N-2	800 MCM	350 MCM	6 ¹ / ₈	3 ³ / ₁₆	1 ⁷ / ₈	1/2	5A	1	1.43	EA
THREE BARREL NEMA TANG DRILLING											
50270	*AAA-2	#2 STR	#14 STR	1.16	1.63	.56	1/4	4A	5	.4	CTN
50273	*AAA-2/0	#2/0 STR	#14 STR	1.47	1.66	.78	1/4	4A	5	.7	CTN
12365	AAA-250N	250 MCM	#6 STR	4	2 ¹³ / ₁₆	1 ³ / ₁₆	1/2	6	3	1.54	CTN
12370	AAA-350N	350 MCM	#6 STR	4 ¹ / ₄	3	1 ³ / ₈	1/2	6	3	1.27	CTN
12372	AAA-600N	600 MCM	#2 STR	4 ¹ / ₂	3 ³ / ₄	1 ⁵ / ₈	1/2	6	1	1.02	EA
12375	AAA-800N	800 MCM	350 MCM	4 ³ / ₄	4 ¹ / ₂	1 ³ / ₄	1/2	6	1	1.58	EA
12380	AAA-1000N	1000 MCM	500 MCM	4 ³ / ₄	4 ¹ / ₂	1 ³ / ₄	1/2	6	1	1.51	EA
12382	AAA-600N-2	600 MCM	#2 STR	5 ⁷ / ₈	3 ³ / ₄	1 ⁵ / ₈	1/2	7	1	1.71	EA
12377	AAA-800N-2	800 MCM	350 MCM	6 ¹ / ₈	4 ³ / ₁₆	1 ⁷ / ₈	1/2	7	1	1.68	EA
12383	AAA-1000N-2	1000 MCM	500 MCM	6 ¹ / ₈	4 ³ / ₄	1 ⁷ / ₈	1/2	7	1	1.66	EA
FOUR BARREL NEMA TANG DRILLING											
12385	AAAA-250N	250 MCM	#6 STR	4	3 ³ / ₄	1 ³ / ₁₆	1/2	8	3	2.11	CTN
12390	AAAA-350N	350 MCM	#6 STR	4 ⁵ / ₁₆	4	1 ³ / ₈	1/2	8	3	2.65	CTN
12392	AAAA-600N	600 MCM	#2 STR	4 ¹ / ₂	4 ⁷ / ₈	1 ⁵ / ₈	1/2	8	1	1.34	EA
12395	AAAA-800N	800 MCM	350 MCM	4 ³ / ₄	5 ¹ / ₂	1 ³ / ₄	1/2	8	1	2.07	EA
12399	AAAA-1000N	1000 MCM	500 MCM	4 ³ / ₄	5	1 ³ / ₄	1/2	8	1	1.80	EA
12396	AAAA-600N-2	600 MCM	#2 STR	5 ⁷ / ₈	5 ¹ / ₈	1 ⁵ / ₈	1/2	9	1	2.36	EA
12397	AAAA-800N-2	800 MCM	350 MCM	6 ¹ / ₈	5 ¹ / ₂	1 ⁷ / ₈	1/2	9	1	2.56	EA
12398	AAAA-1000N-2	1000 MCM	500 MCM	6 ¹ / ₈	6 ¹ / ₈	1 ⁷ / ₈	1/2	9	1	2.56	EA

Suffix "N" indicates NEMA tang drilling, 1/4" on centers for 1/2" bolts.

* Not NEMA tang drilling.




Figure 5



Figure 6
Fits 2-Hole or 4-Hole
NEMA Bolt Pattern



Figure 8




Figure 5A




Figure 7




Figure 9




Dual-Rated

600 V
*CUAL



ALUMINUM PANELBOARD LUGS

Range-taking mechanical set-screw lugs
High strength extruded aluminum alloy
Electro tin plated

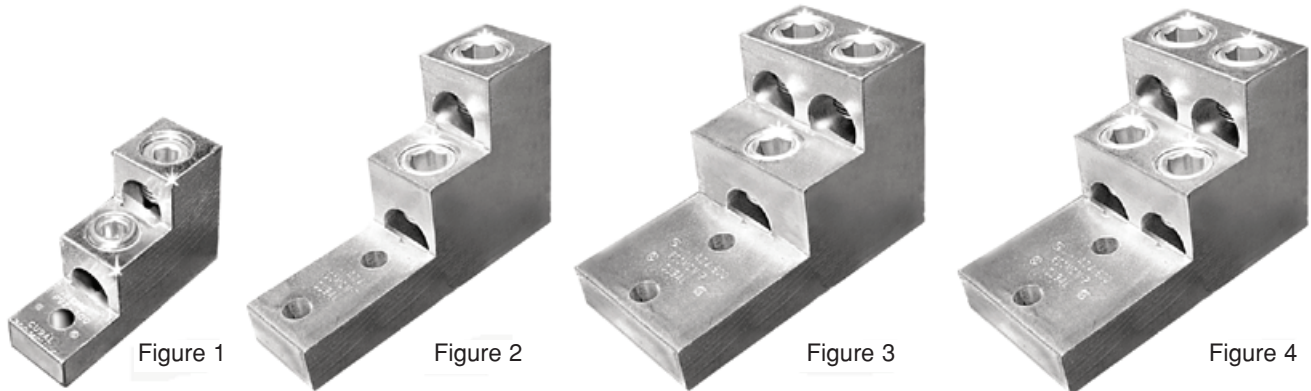

AQ SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE		BOLT		DIMENSIONS (IN)			*TEMP. RATING	FIG.	EST. SHIPPING	
		MAX.	MIN.	SIZE	SPACING	L	W	H			WEIGHT (lbs)	UNIT
12400	AQ 2-300	300 MCM	#6 STR	5/16	-	3.00	1.00	2.0	CU9AL	1	0.39	EA
12405	AQ 2-600	600 MCM	#2 STR	3/8	1 3/8	5.06	1.50	3.0	CU7AL	2	1.05	EA
12410	AQ 2-800	800 MCM	300 MCM	3/8	1 3/8	4.91	1.50	3.0	CU7AL	2	1.02	EA
12415	AQ 3-600	600 MCM	#2 STR	3/8	1 3/8	5.06	2.47	2.9	CU7AL	3	1.71	EA
12420	AQ 3-800	800 MCM	300 MCM	3/8	1 3/8	4.91	2.63	3.0	CU7AL	3	1.79	EA
12425	AQ 4-600	600 MCM	#2 STR	3/8	1 3/8	5.06	2.47	2.9	CU7AL	4	0.96	EA
12430	AQ 4-800	800 MCM	300 MCM	3/8	1 3/8	4.91	2.63	3.0	CU7AL	4	1.55	EA
12452	AQ 6-500-2	500 MCM	#2 STR	3/8	1 3/8	4.90	3.75	3.0	CU9AL	5	1.83	EA
12472	AQ 6-750-2	750 MCM	1/0 STR	3/8	1 3/8	4.90	3.75	3.0	CU9AL	5	1.70	EA
12474	AQ 6-750-4N	750 MCM	1/0 STR	1/2	1 3/8	5.35	3.75	3.0	CU9AL	6	1.73	EA

For Stainless Steel mounting hardware, see HARDWARE section.

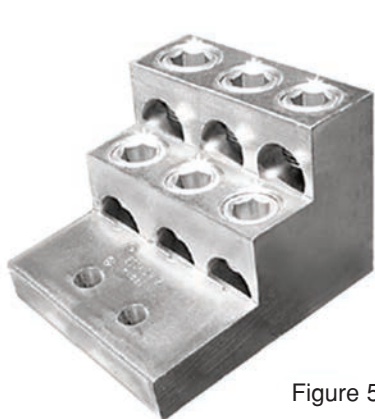


Figure 5

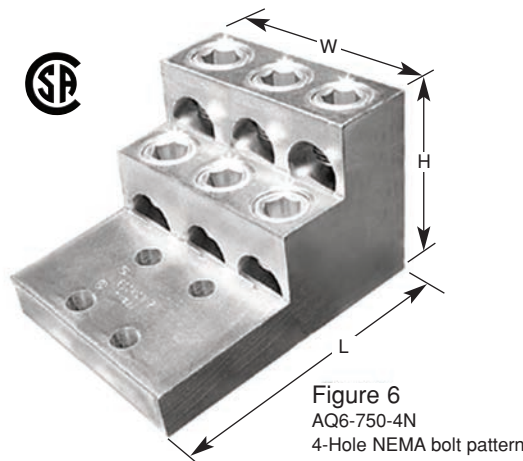


Figure 6
AQ6-750-4N
4-Hole NEMA bolt pattern



TRANSFORMER LUG KITS

Kits contain lugs and hardware for typical dry-type transformer installations

Dual-rated lugs are suitable for copper or aluminum wire (ALCU)

Lugs made of high-strength 6061-T6 aluminum alloy, electro-tin plated


Lugs are UL listed and CSA certified

Stainless steel hardware packaged in plastic bags

Dual-Rated

CU9AL

600V

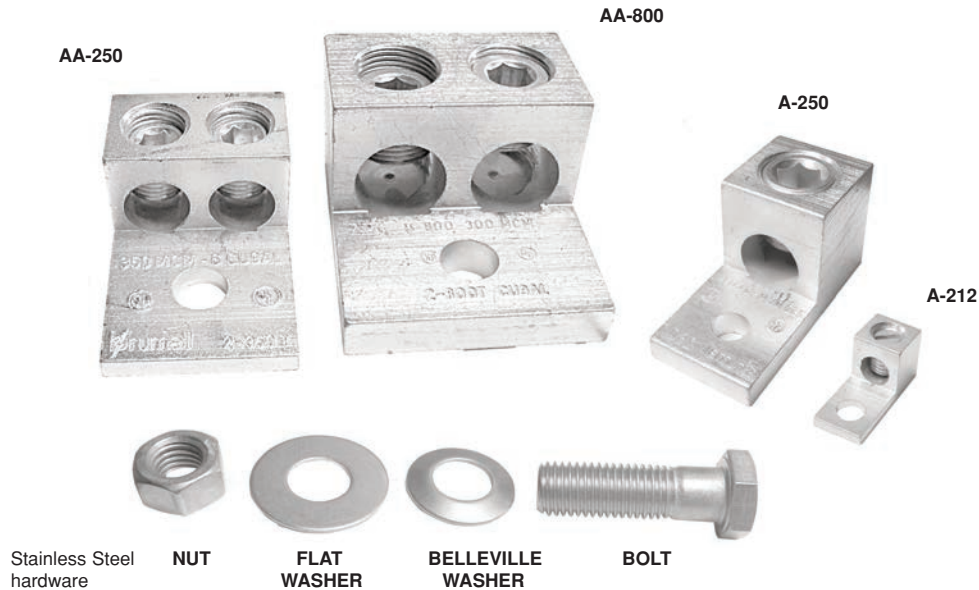

TLK SERIES

NAED NUMBER	CATALOG NUMBER	TRANSFORMER KVA SIZE	ALUM (ALCU) LUGS		ST STEEL HARDWARE (QTY) DESCRIPTION	EST. SHIPPING	
			(QTY) LUG # WIRES/LUG	WIRE RANGE		WEIGHT (lbs)	UNIT
50280	TLK-15	15-37½ 1Ø 15-45 3Ø	(8) #A-212	#2-14 AWG	(8) 1/4-20X3/4 BOLT (8) 1/4 NUT (16) 1/4 FLAT WASHER	0.75	KIT
			(4) #A-250	250MCM-#6AWG			
50282	TLK-75	50-75 1Ø 75-112½ 3Ø	(12) #A-250	250MCM-#6AWG	(8) 1/4-20X3/4 BOLT (8) 1/4-20X2 BOLT (12) 1/4 NUT (24) 1/4 FLAT WASHER	1.9	KIT
50284	TLK-150	100-167 1Ø 150-300 3Ø	(6) #AA-350	350MCM-#6 AWG	(8) 1/2-13X2 BOLT (8) 1/2-13X2 1/2 BOLT (13) 1/2 NUT (26) 1/2 FLAT WASHER (13) 1/2 BELLEVILLE WASHER	9.9	KIT
			(7) #AA-800	800-300MCM			
50286	TLK-500	400-500 3Ø	(15) #AA-800	800-300MCM	(7) 1/2-13X2 BOLT (4) 1/2-13X2 1/2 BOLT (11) 1/2-13 NUT (22) 1/2 FLAT WASHER (11) 1/2 BELLEVILLE WASHER	16.0	KIT

BLZNG or BLOX oxide-inhibitor is recommended for all aluminum terminations.

For lug dimensions, see appropriate catalog page.

Other kits available upon request.



GREAVES

ALUMINUM TWO-WAY CONNECTORS

Range-taking mechanical set-screw in-line splice/reducer

High strength aluminum alloy 6061-T6

Tin-plated for low contact resistance

Positive center stop



Dual-Rated

CU7AL

90°C 600V




Figure 1




Figure 2



Figure 3

ABS SERIES

Splices

NAED NUMBER	CATALOG NUMBER	WIRE RANGE		SCREWS		OVERALL LENGTH	FIG.	CTN QTY	EST. SHIPPING	
		MAX.	MIN.	NO.	TYPE				WEIGHT (lbs)	UNIT
12501	ABS 2	#2	#14	2	SLOT	1 ³ / ₈	1	25	0.98	CTN
12502	ABS 10	1/0	#14	2	SLOT	2	1	25	1.38	CTN
12503	ABS 40	4/0	#6	2	5/16 HEX	2	2	25	3.34	CTN
12504	ABS 250	250	#6	4	5/16 HEX	4	3	12	2.92	CTN
12506	ABS 350	350	#6	4	3/8 HEX	4 ¹ / ₄	3	12	4.60	CTN
12507	ABS 500	500	3/0	4	3/8 HEX	5	3	6	4.44	CTN
12508	ABS 750	750	250	4	3/8 HEX	6 ¹ / ₄	3	3	2.74	CTN