



# GREAVES



## POWER DISTRIBUTION

### INSULATED MOUNTABLE

Isolated bolt holes for mounting to trough, panel or wireway

Most sizes available from stock

Insulated with rugged high-dielectric rubber/vinyl coating

Saves installation time—no taping

Pre-filled with oxide-inhibitor

Plugs marked with connector max wire size for easy identification

6061-T6 high strength aluminum alloy

For flex/extra-flex high-strand wire, first install a PT-FX Shoo-Pin™ Adapter

Copper wire only for #14-#6 AWG

**Dual-Rated**

90°C

CU9AL

600V




### USA-M SERIES

### One-Side Entry

NAED NUMBER	CATALOG NUMBER	WIRE PORTS	WIRE RANGE	ALLEN HEX	DIMENSIONS		MOUNTING BOLT SIZE	EST. SHIPPING	
					LENGTH	HEIGHT		WEIGHT (lbs)	UNIT
17142	USA 4-2M	2			1.97			0.15	EA
17144	USA 4-4M	4	#4-14	1/8	2.82	1.45	#10	0.22	EA
17146	USA 4-6M	6			3.65			0.28	EA
17122	USA 2-2M	2			1.99			0.15	EA
17124	USA 2-4M	4	#2-14	5/32	2.87	1.45	#10	0.22	EA
17126	USA 2-6M	6			3.69			0.28	EA
17102	USA 2/0-2M	2			3.01			0.26	EA
17103	USA 2/0-3M	3			3.69			0.31	EA
17104	USA 2/0-4M	4	2/0-14	7/32	4.36	1.50	#12	0.36	EA
17105	USA 2/0-5M	5			4.74			0.43	EA
17106	USA 2/0-6M	6			5.41			0.50	EA
17152	USA 250-2M	2			3.85			0.52	EA
17153	USA 250-3M	3			4.71			0.65	EA
17154	USA 250-4M	4	250-#6	5/16	5.57	2.10	1/4	0.78	EA
17155	USA 250-5M	5			6.43			0.96	EA
17156	USA 250-6M	6			7.29			1.01	EA
17132	USA 350-2M	2			4.57			0.85	EA
17133	USA 350-3M	3			5.62			1.04	EA
17134	USA 350-4M	4	350-#6	5/16	6.67	2.50	5/16	1.22	EA
17135	USA 350-5M	5			7.72			1.37	EA
17136	USA 350-6M	6			8.77			1.65	EA
17162	USA 600-2M	2			5.63			1.08	EA
17163	USA 600-3M	3			7.11			1.65	EA
17164	USA 600-4M	4	600-#4	5/16	8.47	2.90	5/16	1.95	EA
17165	USA 600-5M	5			9.83			2.22	EA
17166	USA 600-6M	6			11.18			2.63	EA
17172	*USA 750-2M	2			6.19			1.41	EA
17173	*USA 750-3M	3			7.75			2.61	EA
17174	*USA 750-4M	4	750-250	5/16	9.18	3.60	5/16	3.04	EA
17175	*USA 750-5M	5			10.60			3.44	EA
17176	*USA 750-6M	6			12.03			3.91	EA

\* 750 MCM size not UL Listed.

### MOUNTABLE

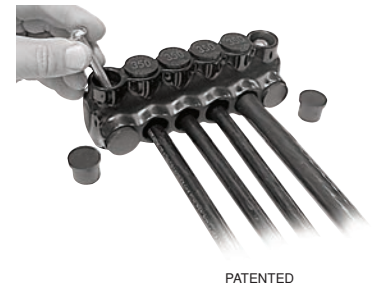

End positions are modified and insulated for mounting bolts



## POWER DISTRIBUTION

### INSULATED MOUNTABLE

Isolated bolt holes for mounting to trough, panel or wireway  
 Most sizes available from stock  
 Insulated with rugged high-dielectric rubber/vinyl coating  
 Saves installation time—no taping  
 Pre-filled with oxide-inhibitor  
 Plugs marked with connector max wire size for easy identification  
 6061-T6 high strength aluminum alloy  
 For flex/extra-flex high-strand wire, first install a PT-FX Shoo-Pin™ Adapter  
 Copper wire only for #14-#6 AWG

**Dual-Rated**  
 90°C  
 CU9AL  
 600V



### USAD-M SERIES

### Optional-Side Entry

NAED NUMBER	CATALOG NUMBER	WIRE PORTS	WIRE RANGE	ALLEN HEX	DIMENSIONS		MOUNTING BOLT SIZE	EST. SHIPPING	
					LENGTH	HEIGHT		WEIGHT (lbs)	UNIT
17242	USAD 4-2M	2			1.97			0.15	EA
17244	USAD 4-4M	4	#4-14	1/8	2.82	1.45	#10	0.30	EA
17246	USAD 4-6M	6			3.65			0.40	EA
17222	USAD 2-2M	2			1.99			0.16	EA
17224	USAD 2-4M	4	#2-14	5/32	2.87	1.45	#10	0.27	EA
17226	USAD 2-6M	6			3.69			0.31	EA
17202	USAD 2/0-2M	2			3.01			0.26	EA
17203	USAD 2/0-3M	3			3.69			0.33	EA
17204	USAD 2/0-4M	4			4.36			0.40	EA
17205	USAD 2/0-5M	5			5.05			0.44	EA
17206	USAD 2/0-6M	6	2/0-14	7/32	5.72	1.50	#12	0.51	EA
17207	USAD 2/0-7M	7			6.37			0.65	EA
17208	USAD 2/0-8M	8			7.03			0.85	EA
17209	USAD 2/0-9M	9			7.76			0.92	EA
17200	USAD 2/0-10M	10			8.40			1.00	EA
17252	USAD 250-2M	2			3.85			0.57	EA
17253	USAD 250-3M	3			4.71			0.72	EA
17254	USAD 250-4M	4			5.57			0.82	EA
17255	USAD 250-5M	5			6.43			0.94	EA
17256	USAD 250-6M	6	250-#6	5/16	7.29	2.10	1/4	1.10	EA
17257	USAD 250-7M	7			8.15			1.31	EA
17258	USAD 250-8M	8			9.01			1.50	EA
17259	USAD 250-9M	9			9.87			1.64	EA
17250	USAD 250-10M	10			10.73			1.89	EA
17232	USAD 350-2M	2			4.57			0.92	EA
17233	USAD 350-3M	3			5.62			1.10	EA
17234	USAD 350-4M	4			6.67			1.35	EA
17235	USAD 350-5M	5			7.72			1.50	EA
17236	USAD 350-6M	6	350-#6	5/16	8.77	2.50	5/16	1.68	EA
17237	USAD 350-7M	7			9.82			2.08	EA
17238	USAD 350-8M	8			10.87			2.30	EA
17239	USAD 350-9M	9			11.92			2.34	EA
17230	USAD 350-10M	10			12.97			2.63	EA
17262	USAD 600-2M	2			5.63			1.50	EA
17263	USAD 600-3M	3			7.11			1.83	EA
17264	USAD 600-4M	4			8.47			2.18	EA
17265	USAD 600-5M	5			9.83			2.69	EA
17266	USAD 600-6M	6	600-#4	5/16	11.18	2.90	5/16	2.81	EA
17267	USAD 600-7M	7			12.53			3.11	EA
17268	USAD 600-8M	8			13.88			3.66	EA
17269	USAD 600-9M	9			15.23			3.88	EA
17260	USAD 600-10M	10			16.58			4.28	EA
17272	*USAD 750-2M	2			6.19			2.21	EA
17273	*USAD 750-3M	3			7.75			2.66	EA
17274	*USAD 750-4M	4			9.18			3.26	EA
17275	*USAD 750-5M	5			10.60			3.69	EA
17276	*USAD 750-6M	6	750-250	5/16	12.03	3.60	5/16	4.23	EA
17277	*USAD 750-7M	7			13.46			4.68	EA
17278	*USAD 750-8M	8			14.88			5.11	EA
17279	*USAD 750-9M	9			16.30			5.56	EA
17270	*USAD 750-10M	10			17.73			5.91	EA

**MOUNTABLE**



PATENTED

End positions are modified and insulated for mounting bolts

\* 750 MCM size not UL Listed.