



## GROUNDING

### BAR OR TOWER GROUND CONNECTORS

Heavy Duty – Bronze castings for strength and ruggedness

Use for grounding cable or wire to a flat bar, plate, or structural steel member

High copper alloy bronze castings with silicon bronze hardware

Suitable for direct burial in earth or concrete

#### Direct Burial

For copper wire only  
Continuous Loop


### TG SERIES

NAED NUMBER	CATALOG NUMBER	CABLE RANGE		BOLT SIZE	EST. SHIPPING	
		MAX	MIN		WEIGHT (lbs)	UNIT
71100	TG 04	#4 STR	#8 SOL	3/8	0.16	EA
71105	TG 20	2/0 STR	#4 SOL	3/8	0.29	EA
71110	TG 25	250 MCM	2/0 SOL	1/2	0.45	EA
71115	TG 50	500 MCM	300 MCM	1/2	0.95	EA
71116	TG 75	750 MCM	550 MCM	5/8	1.25	EA
71120	TGM 04	#4 STR	#8 SOL	3/8	0.13	EA
71125	TGM 20	2/0 STR	#4 SOL	3/8	0.20	EA
71130	TGM 25	250 MCM	2/0 SOL	1/2	0.31	EA
71135	TGM 50	500 MCM	300 MCM	1/2	0.80	EA
71140	TGM 75	750 MCM	550 MCM	5/8	1.22	EA

Consult factory for connectors for bar greater than 1/4" thick.

For tin plating add suffix "P" to CATALOG NUMBERS.

Add suffix "TA" to catalog number and contact factory for availability.

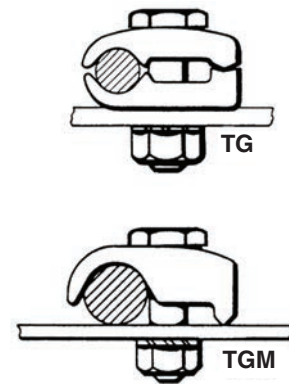

Connects one ground wire to  
1/4" thick bar or stanchion


### TGG SERIES

NAED NUMBER	CATALOG NUMBER	CABLE RANGE		BOLT SIZE	EST. SHIPPING	
		MAX	MIN		WEIGHT (lbs)	UNIT
71101	TGG 04	#4 STR	#8 SOL	3/8	0.23	EA
71106	TGG 20	2/0 STR	#4 SOL	3/8	0.38	EA
71111	TGG 25	250 MCM	2/0 SOL	1/2	0.81	EA
71117	TGG 50	500 MCM	300 MCM	1/2	1.50	EA
71118	TGG 75	750 MCM	550 MCM	5/8	2.20	EA
71121	TGGM 04	#4 STR	#8 SOL	3/8	0.20	EA
71126	TGGM 20	2/0 STR	#4 SOL	3/8	0.28	EA
71131	TGGM 25	250 MCM	2/0 SOL	1/2	0.70	EA
71136	TGGM 50	500 MCM	300 MCM	1/2	1.20	EA
71141	TGGM 75	750 MCM	550 MCM	5/8	2.00	EA

Consult factory for connectors for bar greater than 1/4" thick.

For tin plating add suffix "P" to CATALOG NUMBERS.

Add suffix "TA" to catalog number and contact factory for availability.

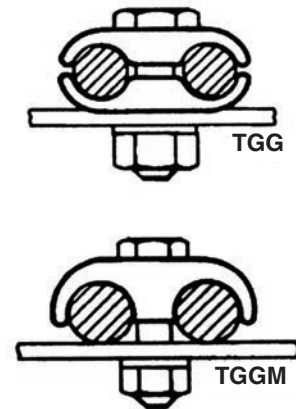

Connects two ground wires  
to 1/4" thick bar or stanchion