




GROUNDING

GROUND BUS BARS

Use to connect multiple ground conductors/lugs in panels
 Includes stand-off brackets (1 inch high) and insulators (1½ inch high)
 Standoff brackets drilled for 3/8 bolts
 Other sizes and lug-mounting patterns also available
 Copper bus 1/4-inch thick
 Individually packaged

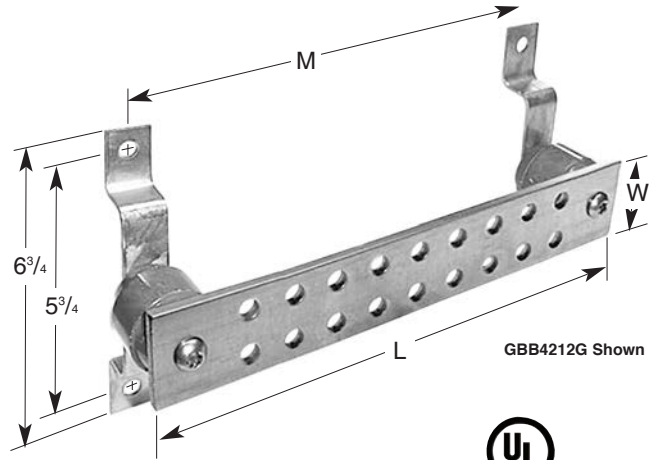

GBB4212G Shown




GBB SERIES

NAED NUMBER	CATALOG NO.	DIMENSIONS (IN)			LUG-HOLES		EST. SHIPPING	
		W	L	M	PATTERN NO.	WEIGHT (lbs)	UNIT	
27183	GBB416H	1	6	-	H	3	2	EA
27188	GBB4212G	2	12	10 ⁹ / ₁₆	G	18	3	EA
27186	GBB4212X	2	12	-	X	16	3	EA
27180	GBB4212N	2	12	10 ⁹ / ₁₆	N	0	3	EA


Available in other configurations, consult factory.
 For tin plating add suffix "P" to CATALOG NUMBERS.

Standard lug-hole patterns


Lug-mounting holes are for 3/8" bolt size (7/16" diameter) unless otherwise noted.

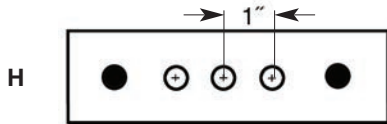

(3) lug-mounting holes (3/8 bolt size)

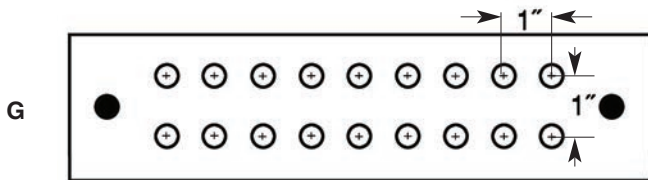

(18) lug-mounting holes (3/8 bolt size), for
 (9) 2-hole lugs (1 inch spacing),
 or (18) 1-hole lugs

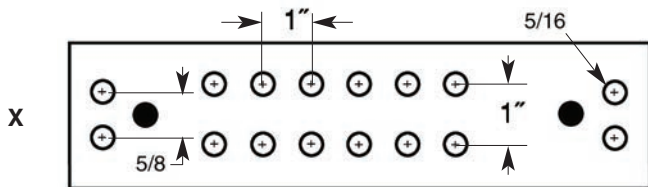

(16) lug-mounting holes for
 (6) 2-hole lugs (3/8 bolt size, 1 inch spacing),
 or (12) 1-hole lugs
 and (2) 2-hole lugs (1/4 bolt size, 5/8 inch spacing)



Blank, supplied with no lug-mounting holes