
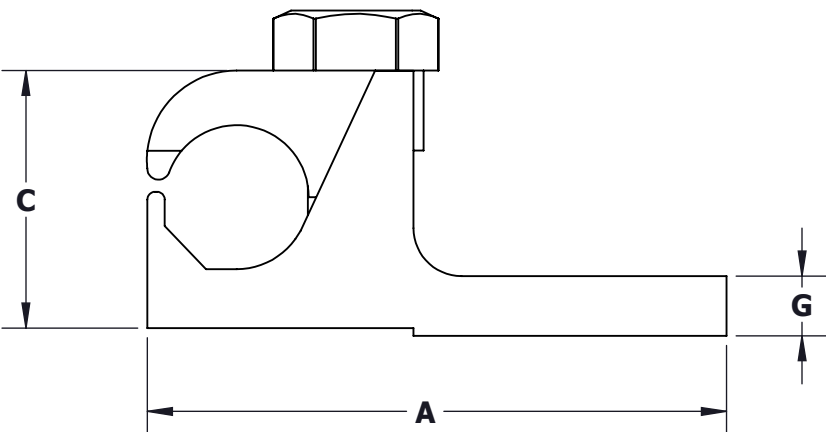


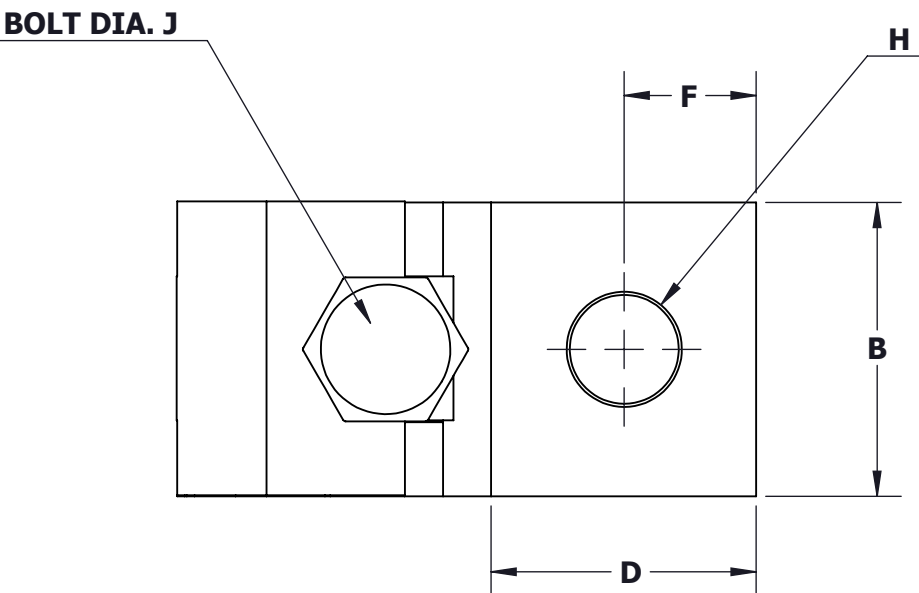

JAR-DB SERIES


LAY-IN LUG FOR
CONTINUOUS LOOP
GROUNDING OR BONDING

2023 NEC ARTICLE 250.122 (F)(1)(a)

IF CIRCUIT CONDUCTORS ARE CONNECTED IN PARALLEL IN THE SAME RACEWAY, AUXILIARY GUTTER OR CABLE TRAY, A SINGLE WIRE TYPE CONDUCTOR SHALL BE PERMITTED AS THE EQUIPMENT GROUNDING CONENCTOR. THE WIRE-TYPE EQUIPMENT GROUNDING CONDUCTOR SHALL BE SIZED IN ACCORDANCE WITH 250.122 BASED ON THE OVERCURRENT PROTECTIVE DEVICE FOR THE FEEDER OR BRANCH CIRCUIT

PART NUMBER	CATALOG NUMBER	CABLE RANGE		MATERIAL		BOLT SIZE	CTN QTY	EST. SHIPPING		DIMENSIONS IN INCHES							
		MIN	MAX	BODY	SCREW			WEIGHT (LBS)	UNIT	A	B	C	D	F	G	H	J
10-27210	J2AR	#4	#1	BRONZE	BRONZE	1/4	25	4.30	CTN	1.63	0.78	0.69	0.84	0.38	0.19	9/32	5/16
10-27211	J3AR	1/0	2/0			3/8	25	6.39		1.94	0.91	0.88	1.00	0.47	0.22	13/32	
10-27212	J4AR	2/0	4/0			7/16	12	4.60		2.25	1.07	1.00	1.19	0.56	0.25	7/16	
10-27213	J5AR	4/0	350			1/2	1	0.59		2.88	1.22	1.25	1.38	0.66	0.28	17/32	3/8
10-27214	J6AR	350	500			1/2	1	0.84		3.07	1.44	1.41	1.63	0.75	0.31	9/16	
10-27215	J7AR	500	750			1/2	1	1.38		3.53	1.69	1.69	1.84	0.88	0.38	21/32	7/16
10-27216	J8AR	750	1000			5/8	1	2.00		4.13	1.94	1.94	1.94	1	0.44	11/16	1/2

USE ON ELECTRICAL EQUIPMENT,
CONDUIT BUSHINGS, JUMPER TO
MULTIPLE CONDUITS
HEAVY DUTY – BRONZE CASTINGS FOR
STRENGTH AND RUGGEDNESS
HIGH COPPER ALLOY BRONZE CASTINGS
WITH SILICON BRONZE HARDWARE
SUITABLE FOR DIRECT BURIAL IN EARTH
OR CONCRETE

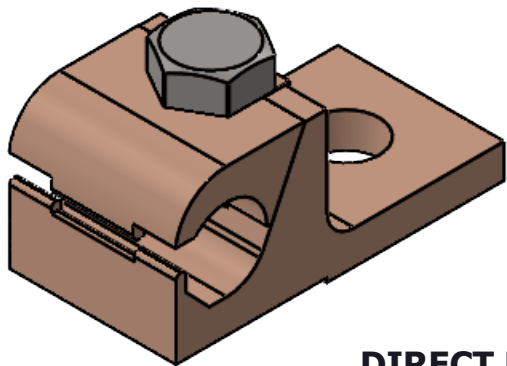

DIRECT BURIAL
CONTINUOUS LOOP
COPPER WIRE ONLY

*JAR-DB NOT UL

APPROVALS		DATE			GREAVES CORPORATION 30 INDUSTRIAL PARK ROAD CENTERBROOK, CT 06409				
DRAFTER	SHG	2/19/2026							
CHECKER	PTO	2/24/2026							
DIMENSIONS ARE FOR REFERENCE ONLY				TITLE JAR—DB— SERIES					
MATERIAL									
SEE NOTES									
FINISH				SIZE		DWG. NO		REV	
SEE NOTES				B		SD—11—00110		—	
SCALE		2:1		WEIGHT		0.92 LBS.		SHEET 1 OF 1	