



GROUNDING

BOND STUDS

Lay-in connector for continuous loop grounding
Use to ground 1 or 2 conductors to bar or plate
High copper bronze alloy for maximum conductivity
Suitable for direct burial in earth or concrete


Direct Burial

Copper cable only
Continuous Loop

BS SERIES

Standard and Long Stud

NAED NUMBER	CATALOG NUMBER	MAX. WIRE SIZE		STUD THREAD	STUD LENGTH		CTN QTY	EST. SHIPPING		
		SOLID	STRND.		STANDARD	LONG*		WEIGHT (lbs)	UNIT	
ONE WIRE										
70740	BS 1-7	#6	#7	1/4 - 20	1/2	1	25	1.35	CTN	
70745	BS 1-5	#4	#5	5/16 - 18	9/16	1	25	2.35	CTN	
70750	BS 1-3	#2	#3	3/8 - 16	5/8	1 1/8	25	2.85	CTN	
70755	BS 1-2	#1	#2	3/8 - 16	5/8	1 1/8	25	3.10	CTN	
70760	BS 1-10	2/0	1/0	1/2 - 13	3/4	1 1/4	10	2.20	CTN	
70765	BS 1-20	3/0	2/0	1/2 - 13	3/4	1 1/4	10	3.20	CTN	
70775	BS 1-40	-	4/0	5/8 - 11	1	1 1/2	5	2.70	CTN	
TWO WIRE										
70780	BS 2-7	#6	#7	1/4 - 20	1/2	1	25	1.85	CTN	
70785	BS 2-5	#4	#5	5/16 - 18	9/16	1	25	2.10	CTN	
70790	BS 2-3	#2	#3	3/8 - 16	5/8	1 1/8	25	3.60	CTN	
70795	BS 2-2	#1	#2	3/8 - 16	5/8	1 1/8	25	4.25	CTN	
70800	BS 2-10	2/0	1/0	1/2 - 13	3/4	1 1/4	10	2.50	CTN	
70805	BS 2-20	3/0	2/0	1/2 - 13	3/4	1 1/4	10	3.50	CTN	
70815	BS 2-40	-	4/0	5/8 - 11	1	1 1/2	5	3.00	CTN	

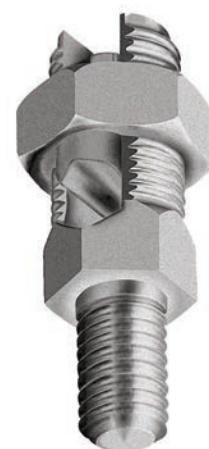

Bronze nuts, flat washers and lockwashers also available for mounting (sold separately). See HARDWARE pages.

For tin plating add suffix "P" to Catalog Number, consult factory for availability and price.

*For long stud add suffix "L" to Catalog Number, consult factory for availability and price.

For sizes not listed consult factory for delivery.

LAY-IN LUG FOR CONTINUOUS LOOP GROUNDING OR BONDING

Use on electrical equipment, conduit bushings, jumper to multiple conduits
Heavy Duty – Bronze castings for strength and ruggedness
High copper alloy bronze castings with silicon bronze hardware
Suitable for direct burial in earth or concrete

Direct Burial

Copper cable only
Continuous Loop

JAR-DB SERIES

Lay-in Lugs

NAED NUMBER	CATALOG NUMBER	MATERIAL		WIRE RANGE	BOLT SIZE	CTN QTY	EST. SHIPPING	
		BODY	SCREW				WEIGHT (lbs)	UNIT
27201	BTL 4-DB	COPPER	STAINLESS STEEL	#4 - 14	#10	50	3.06	CTN
27205	BTL 414-DB			#4 - 14	1/4	50	3.89	CTN
27210	J 2AR-DB	BRONZE	BRONZE	#1 - 4	1/4	25	4.30	CTN
27211	J 3AR-DB			2/0 - 1/0	3/8	25	6.39	CTN
27212	J 4AR-DB			4/0 - 2/0	7/16	12	4.60	CTN
27213	J 5AR-DB			350 - 4/0	1/2	1	0.59	EA
27214	J 6AR-DB			500 - 350	1/2	1	0.84	EA
27215	J 7AR-DB			750 - 500	1/2	1	1.38	EA
27216	J 8AR-DB	1000 - 750	5/8	1	2.00	EA		

*JAR-DB not UL.



BTL-DB



*JAR-DB

