




# GREAVES

## NEUTRAL BARS

### MULTI-CIRCUIT NEUTRAL BARS

For use as neutral bar or grounding bar  
 Easy to install, reuseable  
 Feedwire can be located in any wire-position  
 Standard screws are plated steel, slotted, headless  
 Mounting holes provided in specified positions

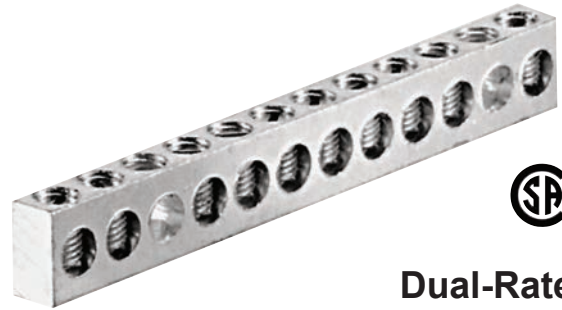

**Dual-Rated**  
600V

### ALUMINUM NEUTRAL BARS

Solid-bar high-strength 6061-T6 aluminum alloy  
 Plated for low surface resistance

#### ANB SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	WIRE CIRCUITS	DIMENSIONS			MOUNTING HOLES		CTN QTY	EST. SHIPPING	
				L	W	H	NO.	POSITION		WEIGHT (lbs)	UNIT
26102	ANB4-4-1	#4-14AWG	4	1.57			1	3	100	2.16	CTN
26103	ANB4-4-3	#4-14AWG	4	1.88	.31	.44	2	1 & 4	100	3.16	CTN
26105	ANB4-5-2	#4-14AWG	5	2.25	.31	.44	2	OUTBOARD	100	3.16	CTN
26107	ANB4-6-1	#4-14AWG	6	2.25			1	4	100	3.16	CTN
26108	ANB4-6-3	#4-14AWG	6	2.56	.31	.44	2	4 & 7	100	4.16	CTN
26109	ANB4-7-3	#4-14AWG	7	2.87			2	3 & 7	100	4.16	CTN
26110	ANB4-9-2	#4-14AWG	9	3.50			2	OUTBOARD	50	2.66	CTN
26111	ANB4-10-2	#4-14AWG	10	3.81			2	OUTBOARD	50	3.16	CTN
26112	ANB4-12-2	#4-14AWG	12	4.43	.31	.44	2	OUTBOARD	50	3.66	CTN
26115	ANB4-15-2	#4-14AWG	15	5.37			2	OUTBOARD	50	4.66	CTN
26116	ANB4-20-2	#4-14AWG	20	6.93			2	OUTBOARD	50	6.16	CTN
26100	ANB4-190*	#4-14AWG	190	60	.31	.44	-	-	10	12.50	CTN
26121	ANB2-10-3	#2-14AWG	10	4.12	.37	.50	2	3 & 11	50	6.16	CTN
26132	ANB20-3-3	2/0-14AWG	3	2.95			2	2 & 4	25	3.16	CTN
26133	ANB20-6-2	2/0-14AWG	6	5.00	.56	.75	2	OUTBOARD	25	3.66	CTN

Other sizes available. Contact factory.

Hole Spacing: ANB4 = .312, ANB2 = .34, ANB20 = .625

Mounting Bolt Size: ANB4 = #10, ANB2 = 3/16, ANB20 = 3/16

### COPPER NEUTRAL BARS

Solid-bar high-conductivity pure electrolytic copper  
 Plain copper finish


#### CNB SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	WIRE CIRCUITS	DIMENSIONS			MOUNTING HOLES		CTN QTY	EST. SHIPPING	
				L	W	H	NO.	POSITION		WEIGHT (lbs)	UNIT
26204	CNB4-4-2	#4-14AWG	4	1.88			2	OUTBOARD	100	6.16	CTN
26205	CNB4-5-2	#4-14AWG	5	2.25	.31	.44	2	OUTBOARD	100	7.16	CTN
26206	CNB4-6-2	#4-14AWG	6	2.56			2	OUTBOARD	50	4.16	CTN
26212	CNB4-12-2	#4-14AWG	12	4.43			2	OUTBOARD	50	7.16	CTN
26213	CNB4-13-3	#4-14AWG	13	4.74	.31	.44	2	3 & 13	50	8.16	CTN
26200	CNB4-190*	#4-14AWG	190	60	.31	.44	-	-	10	20.00	CTN
26223	CNB2-6-2	#2-14AWG	6	3.25	.37	.62	2	2 & 7	25	12.7	CTN

Other sizes available. Contact factory.

Hole Spacing: CNB4 = .312, CNB2 = .397. Mounting Bolt Size: CNB4 = #10, CNB2 = 3/16

\* Supplied with screws unassembled

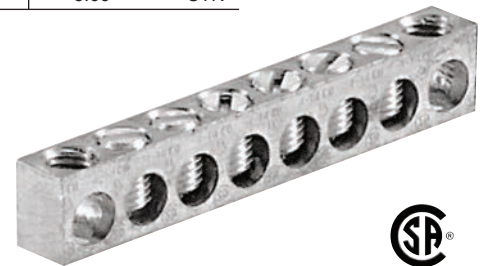

For copper cable  
600V