

## RING TERMINALS




### R SERIES

#### NON-INSULATED

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	STUD SIZE	COLOR	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
					L	W		WEIGHT (lbs)	UNIT
16006	R 18-6	#18-22	6	-	.61	.315	100	0.17	BOX
16008	R 18-8		8					0.17	BOX
16010	R 18-10		10					0.14	BOX
16014	R 18-14		1/4		.79	.472		0.15	BOX
16026	R 14-6	#14-16	6	-	.50	.256	100	0.18	BOX
16028	R 14-8		8					0.17	BOX
16030	R 14-10		10					0.15	BOX
16034	R 14-14		1/4		.63	.315		0.18	BOX
16036	R 14-56		5/16		1.0	.4		0.2	BOX
16046	R 10-6	#10-12	6	-	.77	.37	100	0.18	BOX
16048	R 10-8		8					0.18	BOX
16050	R 10-10		10					0.15	BOX
16054	R 10-14		1/4		.91	.472		0.25	BOX
16056	R 10-56		5/16		1.1	.591		0.29	BOX
16058	R 10-38		3/8		1.40	.81		0.28	BOX
16060	R 10-48		1/2		1.60	.87		0.47	BOX
16064	*R 8-14	#8	1/4	-	1.07	.60	25	0.22	BOX
16068	*R 8-20		3/8					0.20	BOX
16084	*R 6-14		1/4					0.31	BOX
16088	*R 6-38	#6	3/8	-	1.20	.63	25	0.26	BOX
16089	*R 6-48		1/2					0.47	BOX

DISCONTINUED

Butted Seam



Non-Insulated


Brazed Seam

#### VINYL INSULATED

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	STUD SIZE	COLOR	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
					L	W		WEIGHT (lbs)	UNIT
16104	* R 18-4V	#18-22	4	RED	.90	.25	100	0.20	BOX
16106	R 18-6V		6					0.20	BOX
16108	R 18-8V		8					0.20	BOX
16110	R 18-10V		10		.827	.315		0.20	BOX
16114	* R 18-14V		1/4		1.008	.472		0.28	BOX
16126	R 14-6V	#14-16	6	BLUE	.717	.256	100	0.22	BOX
16128	R 14-8V		8					0.25	BOX
16130	R 14-10V		10					0.20	BOX
16124	R 14-14V		1/4		1.059	.472		0.28	BOX
16136	R 14-56V		5/16		1.059	.472		0.28	BOX
16138	R 14-38V		3/8		1.1	.591		0.27	BOX
16146	R 10-6V	#10-12	6	LOW	.63	.374	50	0.22	BOX
16148	R 10-8V		8					0.21	BOX
16150	R 10-10V		10					0.22	BOX
16054	R 10-14		1/4		1.201	.472		0.29	BOX
16056	R 10-56		5/16		1.398	.591		0.28	BOX
16058	R 10-38		3/8		1.398	.591		0.27	BOX
16160	* R 10V	#8	#10	RED	1.4	.60	25	0.27	BOX
16164	* R 8-14V		1/4					0.25	BOX
16168	* R 8-38V		3/8					0.22	BOX
16180	* R 6-10V	#6	#10	BLUE	1.5	.62	25	0.36	BOX
16184	* R 6-14V		1/4					0.32	BOX
16186	* R 6-56V		5/16					0.34	BOX
16188	* R 6-38V		3/8		1.6			0.35	BOX
16189	* R 6-48V		1/2		2.0	.87		0.51	BOX

DISCONTINUED

Butted Seam



Vinyl Insulated

Brazed Seam

\*Not UL, CSA.



# GREAVES

## RING TERMINALS

### R SERIES

#### NYLON INSULATED

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	STUD SIZE	COLOR	L	W	QTY/ BOX	EST. SHIPPING	
								WEIGHT (lbs)	UNIT
16206	R 18-6N	#18-22	6	RED	.83	.315	100	0.20	BOX
16208	R 18-8N		8		.83	.315		0.20	BOX
16210	R 18-10N		10		.83	.315		0.20	BOX
16214	R 18-14N		1/4		1.01	.472		0.30	BOX
16226	R 14-6N	#14-16	6	BLUE	.72	.315	100	0.23	BOX
16228	R 14-8N		8		.85	.315		0.24	BOX
16230	R 14-10N		10		.85	.315		0.23	BOX
16234	R 14-14N		1/4		1.01	.472		0.36	BOX
16236	R 14-56N	5/16	1/2		1.00	.472		0.40	BOX
16246	R 10-6N	#10-12	6	YELLOW	.83	.315	50	0.28	BOX
16248	R 10-8N		8		1.00	.374		0.28	BOX
16250	R 10-10N		10					0.28	BOX
16254	R 10-14N		1/4		1.20	.472		0.34	BOX
16256	R 10-56N	5/16	1.40	.591	0.34	BOX			
16258	R 10-38N	3/8	1.40	.591	0.34	BOX			
16264	* R 4-14N	#4	1/4	YELLOW	1.80	.68	10	.30	BOX
16266	* R 4-56N		5/16		1.80	.68		.30	BOX
16268	* R 4-38N		3/8		1.80	.68		.30	BOX
16269	* R 4-48N		1/2		2.10	.85		.32	BOX

For other sizes and types, consult factory.

\*Not UL, CSA.

### SOLDERING LUGS – COPPER



Middle weight bare copper lugs for soldering applications

Can also be installed as compression lugs

### CL SERIES (formerly D1 Series)

NAED NUMBER	CATALOG NUMBER	WIRE SIZE	FORMER CAT. NO.	STUD SIZE	AMP RATING	CTN QTY	EST. SHIPPING	
							WEIGHT (lbs)	UNIT
90810	CL810	8	D2	10	35	50	.4	CTN
90814	CL814	8	-	1/4				
90610	CL610	6	D3	10	50	25	.3	CTN
90614	CL614	6	D13	1/4				
90638	CL638	6	-	3/8				
90612	CL612	6	-	1/2				
90414	CL414	4	D4	1/4	70	25	.35	CTN
90438	CL438	4	D24	3/8				
90412	CL412	4	-	1/2				
90214	CL214	2	D5	1/4	90	25	.93	CTN
90256	CL256	2	D15	5/16				
90238	CL238	2	D25	3/8				
90212	CL212	2	-	1/2				
90138	CL138	1	D255	3/8	100	10	.38	CTN
90112	CL112	1	-	1/2				
91014	CL1014	1/0	D6	1/4	125	10	.39	CTN
91038	CL1038	1/0	D26	3/8				
91012	CL1012	1/0	D16	1/2				
92038	CL2038	2/0	D7	3/8	150	10	.51	CTN
92012	CL2012	2/0	D17	1/2				
93038	CL3038	3/0	D8	3/8	175	10	.63	CTN
93012	CL3012	3/0	D18	1/2				
94038	CL4038	4/0	D9	3/8	225	10	.76	CTN
94012	CL4012	4/0	D19	1/2				

For tin plating add suffix "TP" to Catalog Number. Other sizes available, contact factory.




Nylon-Insulated  
Sleeved Barrel





# FORK TERMINALS

## S SERIES



### NON-INSULATED


NAED NUMBER	CATALOG NUMBER	WIRE SIZE	STUD SIZE	COLOR	DIMENSIONS		QTY/BOX	EST. SHIPPING	
					L	W		WEIGHT (lbs)	UNIT
16301	* S 18-4	#18-22	4	—	.630	.228	100	0.15	BOX
16305	S 18-6		6		.630	.224		0.16	BOX
16311	S 18-8		8		.646	.276		0.17	BOX
16315	S 18-10	#14-16	10	—	.689	.378	100	0.15	BOX
16321	* S 18-14		1/4		.787	.433		0.15	BOX
16335	S 14-6	#14-16	6	—	.622	.252	100	0.17	BOX
16341	S 14-8		8		.630	.315		0.18	BOX
16345	S 14-10		10		.630	.315		0.18	BOX
16351	S 14-14	#10-12	1/4	—	.787	.472	50	0.14	BOX
16365	S 10-6		6		.711	.354		0.18	BOX
16371	S 10-8	#10-12	8	—	.711	.354	50	0.14	BOX
16375	S 10-10		10		.711	.354		0.14	BOX
16381	S 10-14		1/4		.921	.354		0.14	BOX



Non-Insulated Butted Seam

### VINYL INSULATED

16401	* S 18-4V	#18-22	4	RED	.846	.228	100	0.21	BOX
16405	S 18-6V		6		.896	.228		0.20	BOX
16411	S 18-8V		8		.862	.250		0.20	BOX
16415	S 18-10V	#14-16	10	—	.906	.376	100	0.20	BOX
16421	S 18-14V		1/4		1.004	.433		0.17	BOX
16431	* S 14-4V	#14-16	4	BLUE	.839	.252	100	0.21	BOX
16435	S 14-6V		6		.839	.252		0.23	BOX
16441	S 14-8V		8		.846	.315		0.27	BOX
16445	S 14-10V	#10-12	10	—	.846	.315	50	0.23	BOX
16451	S 14-14V		1/4		1.004	.472		0.21	BOX
16465	S 10-6V	#10-12	6	YELLOW	1.012	.354	50	0.21	BOX
16471	S 10-8V		8		1.012	.354		0.21	BOX
16475	S 10-10V		10		1.012	.354		0.21	BOX
16481	S 10-14V	1/4	1.287	.354	0.21	BOX			



Vinyl Insulated Butted Seam


### NYLON INSULATED

16501	* S 18-4N	#18-22	4	RED	.846	.228	100	0.21	BOX
16505	S 18-6N		6		.896	.228		0.26	BOX
16511	S 18-8N		8		.862	.216		0.27	BOX
16515	S 18-10N	#14-16	10	—	.906	.376	100	0.28	BOX
16521	S 18-14N		1/4		1.004	.433		0.28	BOX
16535	S 14-6N	#14-16	6	BLUE	.839	.252	100	0.29	BOX
16541	S 14-8N		8		.846	.315		0.28	BOX
16561	S 14-10N		10		.846	.315		0.27	BOX
16563	S 14-14N	#10-12	1/4	—	1.004	.472	50	0.35	BOX
16565	S 10-6N		6		1.012	.354		0.25	BOX
16571	S 10-8N	#10-12	8	YELLOW	1.012	.354	50	0.25	BOX
16575	S 10-10N		10		1.012	.354		0.25	BOX
16581	S 10-14N		1/4		1.287	.354		0.31	BOX




Nylon Insulated Sleeved Barrel


\*Not UL, CSA.



Flange Spade  
Suffix "F"  
Not UL, CSA



Locking Spade  
Suffix "L"



Block Spade  
Suffix "B"



# SPLICES

High conductivity copper, tin plated




## B SERIES


### Butt Splices

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	COLOR	L	QTY/BOX	EST. SHIPPING	
						WEIGHT (lbs)	UNIT
70000	B 18	#18-22	-	.57	100	0.19	BOX
70001	B 14	#14-16	-	.57	100	0.23	BOX
70002	B 10	#10-12	-	.57	50	0.21	BOX
70004	* B 10S	#10-12	-	.88	50	0.27	BOX
70003	* B 8	#8	-	.82	25	0.27	BOX
70010	B 18V	#18-22	RED	.95	100	0.23	BOX
70011	B 14V	#14-16	BLUE	1.0	100	0.33	BOX
70012	B 10V	#10-12	YELLOW	1.01	50	0.21	BOX
70013	* B 8V	#8	RED	1.46	5	0.27	BOX
70021	B 18	#18-22	RED	1.01	100	0.32	BOX
7002	* B 14	#14-16	BLUE	1.02	100	0.33	BOX
70022	* B 10N	#10-12	YELLOW	1.01	50	0.32	BOX

Non-Insulated  
Butt Seam



Vinyl Insulated  
Butted Seam



Nylon Insulated  
Seamless



\* Seamless, not UL, not CSA

Reducing butt splices for copper wires, available bare and vinyl insulated

## B-R SERIES

### Reducing Butt Splices

NAED NUMBER	CATALOG NUMBER	WIRE RANGE		COLOR		QTY/BOX	EST. SHIPPING	
		SIDE A	SIDE B	SIDE A	SIDE B		WEIGHT (lbs)	UNIT
54010	B 14R18	#16-14	#22-18	BLUE	RED STRIPE	100	0.23	BOX
54020	B 10R14	#12-10	#16-14	YELLOW	BLUE STRIPE	50	0.21	BOX
54030	B 8R10	#8	#12-10	RED	YELLOW STRIPE	50	0.21	BOX
54040	B 6R8	#6	#8	BLUE	RED STRIPE	25	0.24	BOX
70041	B 14R18V	#16-14	#22-18	BLUE	RED STRIPE	100	0.25	BOX
70040	B 10R14V	#12-10	#16-14	YELLOW	BLUE STRIPE	50	0.21	BOX
70043	B 8R10V	#8	#12-10	RED	YELLOW STRIPE	50	0.21	BOX
70042	B 6R8V	#6	#8	BLUE	RED STRIPE	25	0.24	BOX

Non-Insulated



Vinyl Insulated




B-R series not UL listed.

## PTV, PTN SERIES

### Pin Terminals

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	COLOR	PIN DIA.	QTY/BOX	EST. SHIPPING	
						WEIGHT (lbs)	UNIT
56018	PTV18	18-22	RED	.08	100	.3	BOX
56014	PTV14	14-16	BLUE	.08	100	.3	BOX
56010	PTV10	10-12	YELLOW	1.05	50	.3	BOX
56118	PTN18	18-22	RED	.08	100	.3	BOX
56114	PTN14	14-16	BLUE	.08	100	.3	BOX
56110	PTN10	10-12	YELLOW	1.05	50	.3	BOX

Vinyl Insulated



Nylon Insulated


PTV,PTN not UL listed.

## C-N SERIES

### Nylon Pigtails

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	COLOR	L	QTY/BOX	EST. SHIPPING	
						WEIGHT (lbs)	UNIT
70031	C 14N	#14-16	Clear	.60	100	0.14	BOX
70032	C 10N	#10-12	Clear	.73	50	0.15	BOX

Vinyl Insulated  
Case  
and Connectors



C-N not UL, CSA.

## SP SERIES

### Snap Plugs - Male

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	COLOR	L	QTY/BOX	EST. SHIPPING	
						WEIGHT (lbs)	UNIT
70050	SP 14M	#14-16	-	.58	50	0.12	BOX
70051	SP 14M	#14-16	BLUE	.84	50	0.15	BOX

Vinyl Insulated  
Butted Seam



### Snap Plugs - Female

70061	SP 156N	#14-16	BLUE	1.025	50	0.15	BOX
-------	---------	--------	------	-------	----	------	-----

Nylon Insulated  
Seamless



SP, FSP not UL, CSA.




## SPADE DISCONNECTS



### F/M SERIES

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	STOCK & SPADE SIZE	COLOR	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
					L	W		WEIGHT (lbs)	UNIT
<b>FEMALE DISCONNECTS</b>									
16600	F 18-110		.020 x .110		.54	.16		0.08	BOX
16602	F 18-187	#18-22	.020 x .187	—	.63	.23		0.13	BOX
16604	F 18-250		.032 x .250		.63	.31	100	0.15	BOX
16606	F 14-110		.020 x .110		.54	.16		0.10	BOX
16608	F 14-187	#14-16	.020 x .187	—	.63	.23		0.13	BOX
16610	F 14-250		.032 x .250		.63	.31		0.22	BOX
16612	F 10-250	#10-12	.032 x .250	—	.63	.31		0.13	BOX
16620	F 18-110V		.020 X .110		.77	.16		0.15	BOX
16622	F 18-187V	#18-22	.020 X .187	—	.86	.23		0.14	BOX
16624	F 18-250V		.032 X .250		.93	.31	100	0.15	BOX
16626	F 14-110V		.020 X .110		.77	.16		0.15	BOX
16628	F 14-187V	#14-16	.020 X .187	BLUE	.87	.23		0.18	BOX
16630	F 14-250V		.032 X .250		.87	.31		0.16	BOX
16632	F 10-250V	#10-12	.032 X .250	YELLOW	.93	.31	50	0.16	BOX
16640	F 18-110N		.020 X .110		.77	.16		0.16	BOX
16642	F 18-187N	#18-22	.020 X .187	RED	.87	.23		0.19	BOX
16644	F 18-250N		.032 X .250		.87	.32	100	0.23	BOX
16646	F 14-110N		.020 X .110		.77	.16		0.18	BOX
16648	F 14-187N	#14-16	.020 X .187	BLUE	.87	.23		0.23	BOX
16650	F 14-250N		.032 X .250		.87	.32		0.29	BOX
16652	F 10-250N	#10-12	.032 X .250	YELLOW	.97	.31	50	0.21	BOX
<b>MALE DISCONNECTS</b>									
16660	M 18-250	#18-22	.032 X .250	—	.72	.25		0.22	BOX
16662	M 14-187	#14-16	.020 X .187		.87	.19		0.17	BOX
16664	M 14-250		.032 X .250		.77	.25		0.15	BOX
16666	M 10-250	#10-12	.032 X .250		.77	.25	50	0.15	BOX
16680	M 18-250	#18-22	.032 X .250	RED	.97	.25		0.23	BOX
16682	M 14-187	#14-16	.020 X .187	BLUE	.80	.19	100	0.13	BOX
16684	M 14-250		.032 X .250		.94	.25		0.17	BOX
16686	M 10-250V	#10-12	.032 X .250	YELLOW	1.05	.25	50	0.12	BOX
16690	M 18-250N	#18-22	.032 X .250	RED	.97	.25		0.26	BOX
16692	M 14-187N	#14-16	.020 X .187	BLUE	.82	.19	100	0.17	BOX
16694	M 14-250N		.032 X .250		.97	.25		0.33	BOX
16696	M 10-250N	#10-12	.032 X .250	YELLOW	1.05	.25	50	0.24	BOX

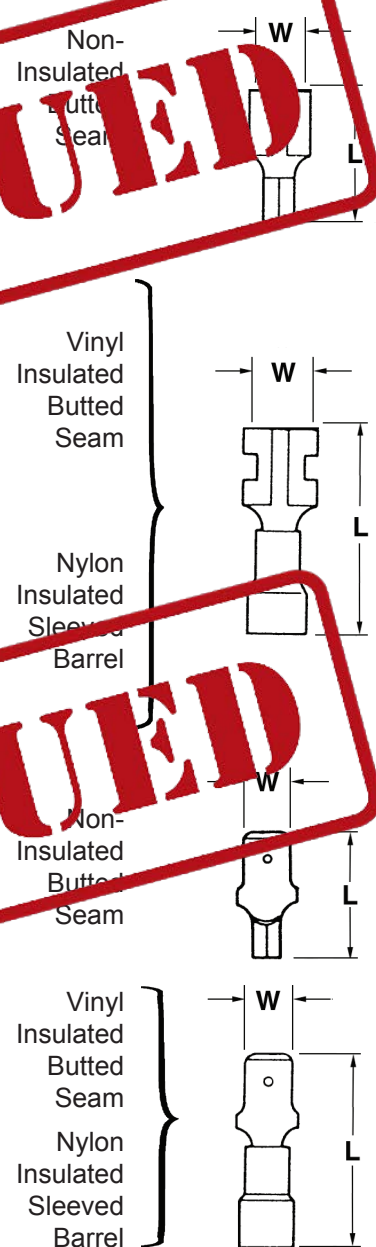

DISCONTINUED

DISCONTINUED



## SPADE DISCONNECTS

### FULLY NYLON INSULATED

For use where a touch-safe connection is important  
 Copper, tin-plated  
 Fully nylon insulated




### F/M-FN SERIES

#### Straight Configuration

Male and female FN  
 Straight Configuration  
 Spade Disconnects  
 form fully insulated sets.

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	COLOR	SPADE SIZE	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
					LENGTH	WIDTH		WEIGHT (lbs)	UNIT
<b>FEMALE DISCONNECTS</b>									
16705	F 18-250FN	#18-22	RED	.032 X .250	.8	.38	50	0.13	BOX
16715	F 14-250FN	#14-16	BLUE	.032 X .250	.84	.38	50	0.13	BOX
16725	F 10-250FN	#10-12	YELLOW	.032 X .250	.94	.38	50	0.18	BOX
<b>MALE DISCONNECTS</b>									
16706	M 18-250FN	#18-22	RED	.032 X .250	1.0	.47	50	0.13	BOX
16716	M 14-250FN	#14-16	BLUE	.032 X .250	1.0	.47	50	0.13	BOX
16726	M 10-250FN	#10-12	YELLOW	.032 X .250	1.1	.47	50	0.22	BOX



### FL-FN SERIES

#### Flag Configuration

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	COLOR	SPADE SIZE	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
					LENGTH	WIDTH		WEIGHT (lbs)	UNIT
<b>FEMALE DISCONNECTS</b>									
16708	FL 18-250FN	#18-22	RED	.032 X .250	.38	.56	50	0.16	BOX
16718	FL 14-250FN	#14-16	BLUE	.032 X .250	.38	.63	50	0.16	BOX




### NON-INSULATED

### FL SERIES

#### Flag Configuration


NAED NUMBER	CATALOG NUMBER	WIRE RANGE	SPADE SIZE	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
				LENGTH	WIDTH		WEIGHT (lbs)	UNIT
16722	FL 14-250	#14-18	.032 X .250	.52	.38	50	0.11	BOX
16720	FL 10-250	#10-12	.032 X .250	.63	.38	50	0.12	BOX



### MMF SERIES

#### Split Configuration

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	SPADE SIZE	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
				LENGTH	WIDTH		WEIGHT (lbs)	UNIT
16724	MMF-250	-	.032 X .250	.75	.56	50	0.18	BOX



DISCONTINUED



## CRIMP TERMINALS

### HIGH TEMPERATURE

For high temperature applications such as in heating systems,  
glass furnaces, processing ovens, HVAC systems

Rated for temperature up to 700°F

Mild steel with bright nickel plating, non-insulated, butted seam

Use on high-temperature wire suitable for the environment



### R-HT SERIES

#### Ring Terminals

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	STUD SIZE	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
				LENGTH	WIDTH		WEIGHT (lbs)	UNIT
16803	R 18-10HT	#18-22	#10	.69	.31	50	0.07	BOX
16811	R 14-6HT		#6	.65	.25	50	0.08	BOX
16813	R 14-10HT	#14-16	#10	.69	.31	50	0.09	BOX
16814	R 14-14HT		1/4	.90	.46	50	0.10	BOX
16821	R 10-6HT		#6	.61	.25	50	0.08	BOX
16822	R 10-8HT		#8	.72	.37	50	0.10	BOX
16823	R 10-10HT	#10-12	#10	.72	.47	50	0.14	BOX
16824	R 10-14HT		1/4	.90	.53	50	0.20	BOX
16825	R 10-18HT		3/8	.97	.60	50	0.20	BOX
16833	R 10-10HT		#10	.97	.47	25	0.16	BOX
16834	R 10-14HT		#8	1/4		25	0.16	BOX

### S-HT SERIES

#### Fork Terminals

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	STUD SIZE	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
				LENGTH	WIDTH		WEIGHT (lbs)	UNIT
16841	S 14-6HT	#14-16	#6	.68	.34	100	0.16	BOX
16842	S 14-8HT	#14-16	#8	.68	.34	100	0.16	BOX
16854	S 10-10HT	#10-12	#10	.75	.38	50	0.13	BOX

### F/M-HT SERIES

#### Spade Disconnects

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	SPADE SIZE	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
				LENGTH	WIDTH		WEIGHT (lbs)	UNIT
16865	F 10-250HT	#14-16	.032 x .25	.63	.31	50	0.10	BOX
16875	F 10-250HT	#10-12	.032 x .250	.63	.31	50	0.11	BOX
16885	M 14-250HT	#14-16	.032 x .25	.70	.25	50	0.18	BOX

### B-HT SERIES

#### Butt Splices

NAED NUMBER	CATALOG NUMBER	WIRE RANGE	DIMENSIONS		QTY/ BOX	EST. SHIPPING	
			LENGTH	I.D.		WEIGHT (lbs)	UNIT
16893	B 14HT	#14-16	.57	.090	50	0.11	BOX
16894	B 10HT	#10-12	.57	.138	50	0.19	BOX

